


EAL

ELECTRIC ADVANCE & LIFT BRACKET



future automation

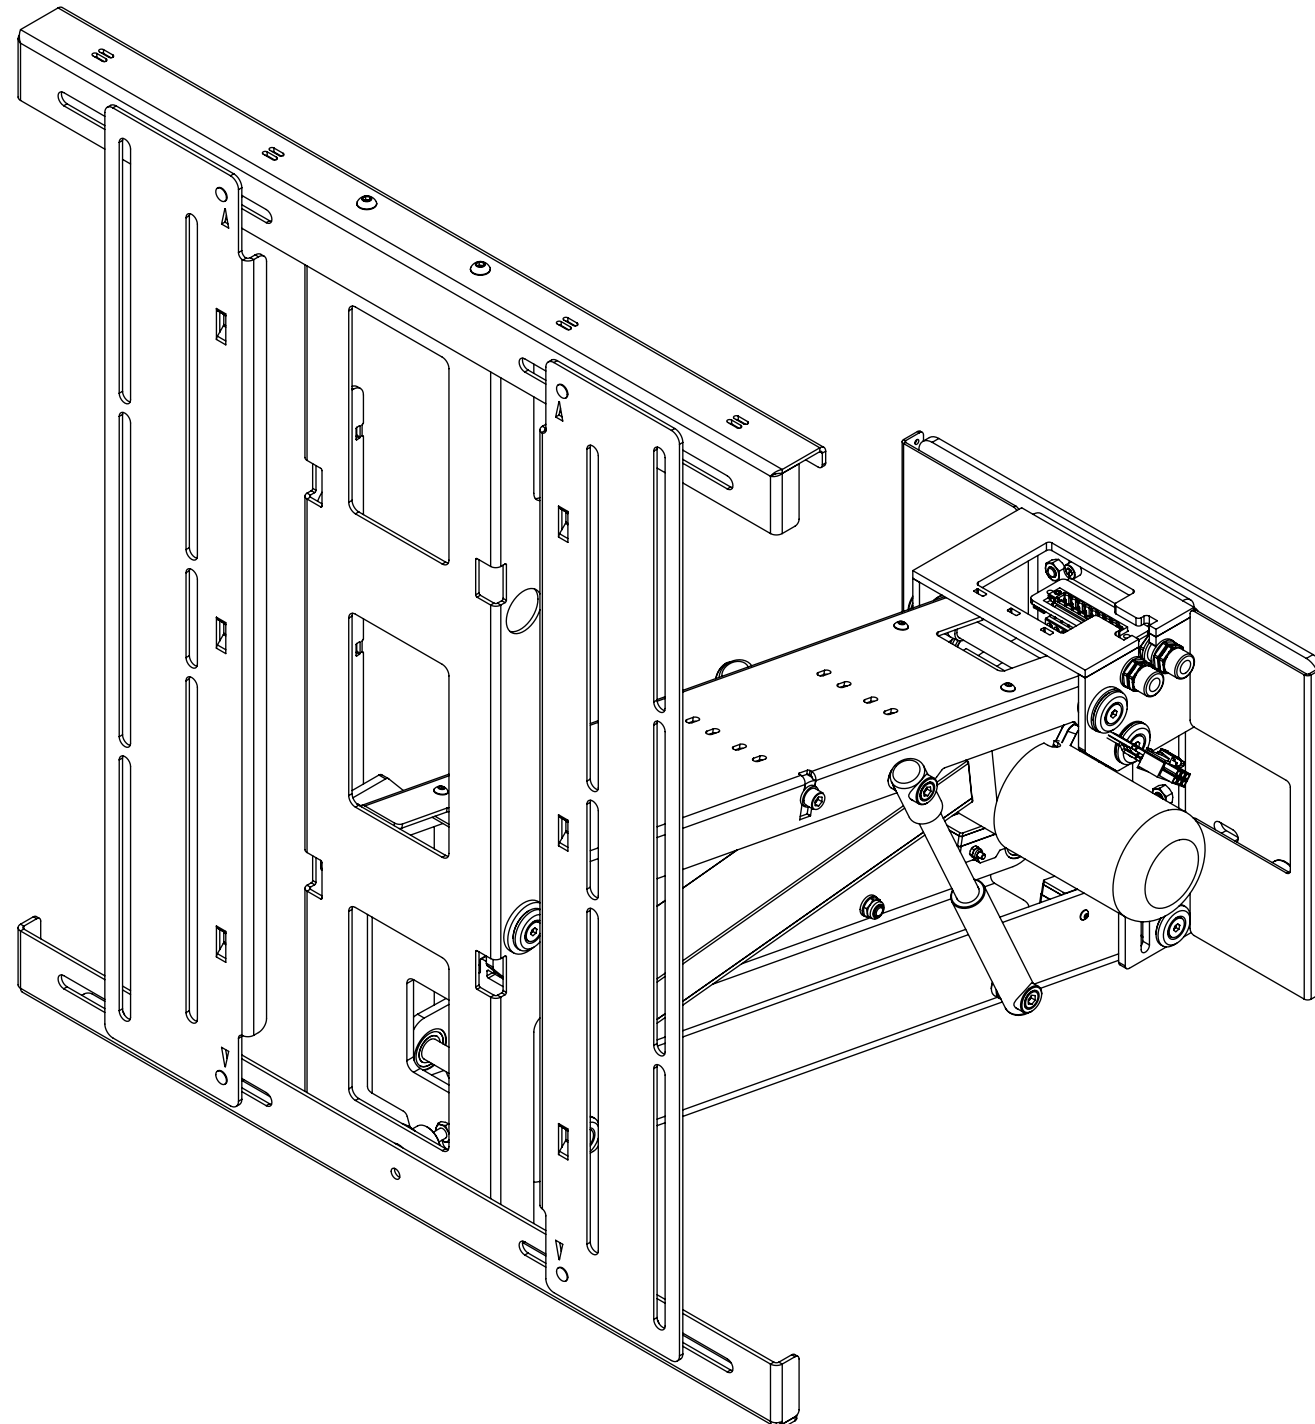

EAL

ELECTRIC ADVANCE & LIFT BRACKET

SPECIFICATION	MEASUREMENTS
Screen Sizes (Approx)	50"-80"
Maximum Weight Capacity	50Kg (110lb)
Depth From Wall	138mm (5 7/16")
Maximum Extension From Wall	550mm (21 5/8")
Maximum Lift from In Position	533mm (21")
Packaging Dimensions	840 x 750 x 270mm (33 1/16" x 29 1/2" x 10 5/8")
Shipping Weight	25Kg (55lb)
Movement Type	Motorised
Power Supply Required	110V - 240V AC
Power Consumption Max.	120W
Power Consumption Standby	3W
Mounting Patterns Supported	VESA 600, 500, 400, 300, 200, 100 W x 500, 400, 300, 200, 100 H
Control Options	IR Remote, RS232, Contact Closure
Product Options / Features	Specific B&O and Loewe mounts / adapters, Custom RAL paint finishes
Package Contents	Mechanism, IR remote control, Control box
Marine Suitable	No

EAL

ELECTRIC ADVANCE & LIFT BRACKET




future automation

CABLE ROUTING

The EAL's mounting allows for cables from the screen to be fed through the intergrated cable management. This allows the cables to be stowed tidily within the mechanism.

Screen and Mechanism cables should be routed to a control box behind the wall via an opening in the back of the wall or a conduit leading to it.

NOTE: TURN THE MECHANISM OFF FROM THE MAINS WHEN ROUTING CABLES. THE EAD HAS A VERY POWERFUL MOTOR AND NO ANTI JAM FEATURE AVAILABLE!

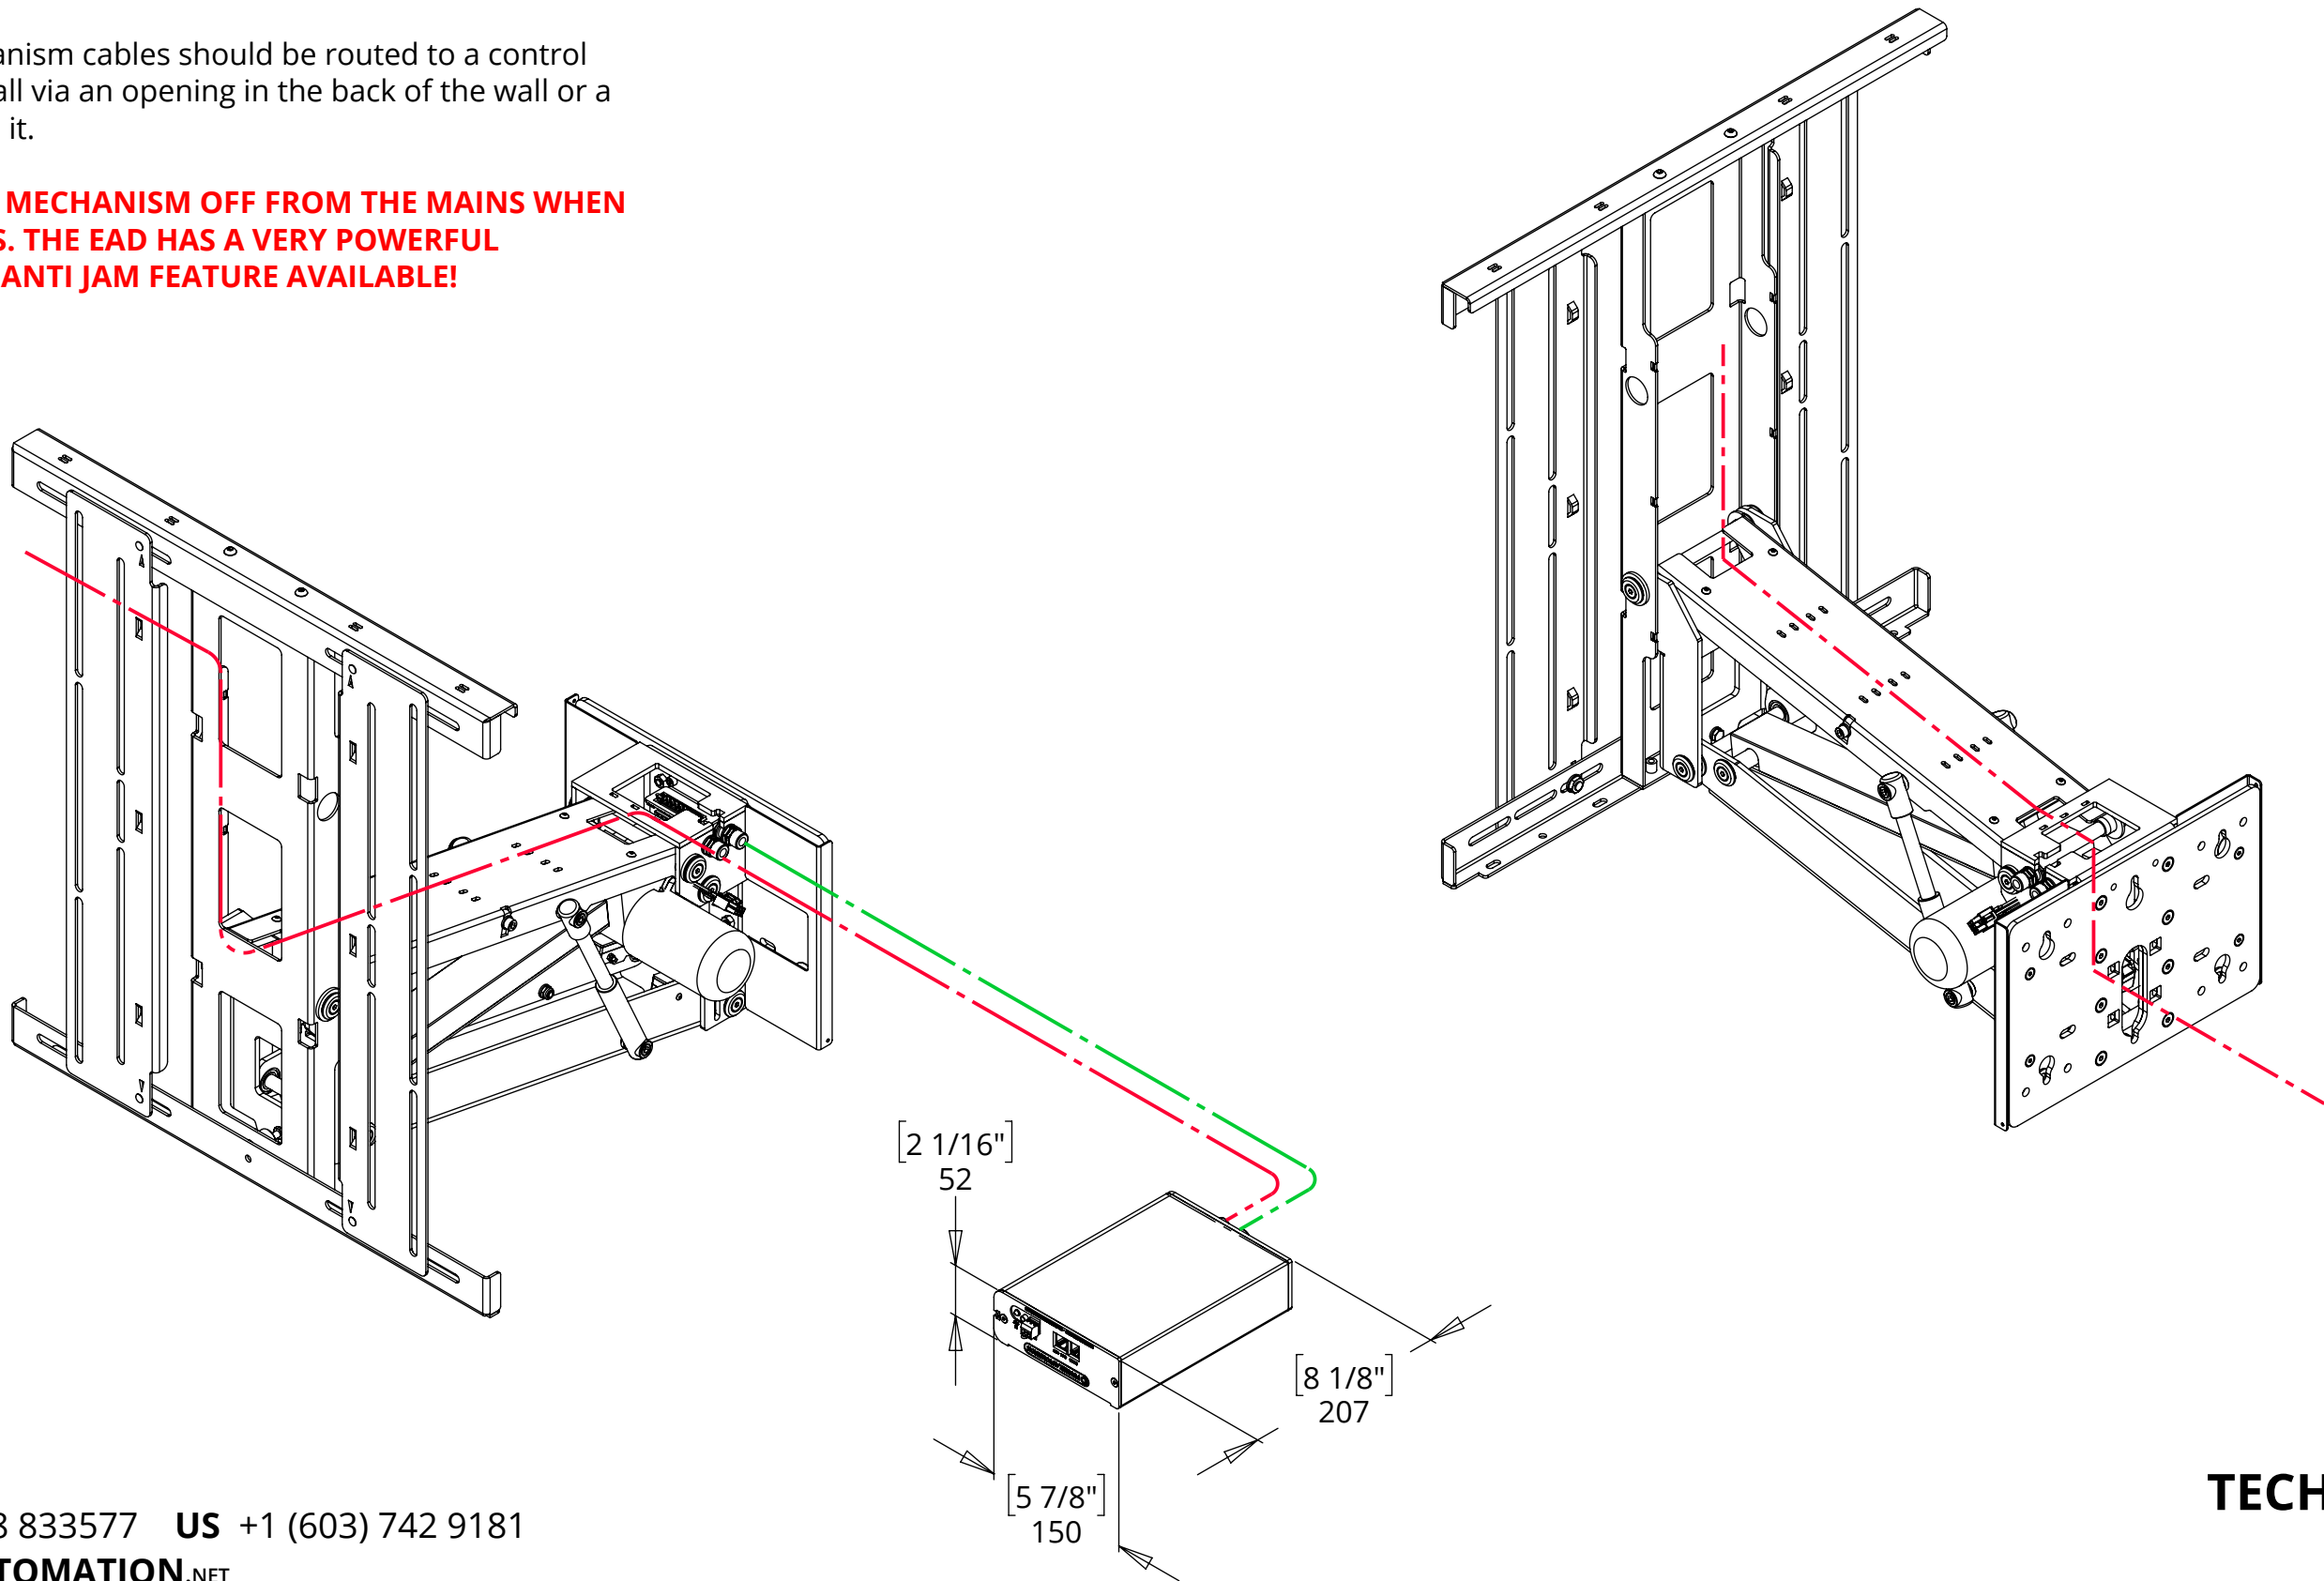

EAL ELECTRIC ADVANCE & LIFT BRACKET

POSITIONING AND MOVEMENT DETAILS


The EAL can clear a 305mm (12") mantle piece with ease when mounted 70mm (2 3/4") below it.

A screen with height of 690mm (27 3/16") will be required to cover the mechanism

The graph below gives an approximation of wall plate height position assuming the top edge of the screen is flush with the wall plate.

Black Line = Wall mounted


Red Line = Recessed in WB-EAD

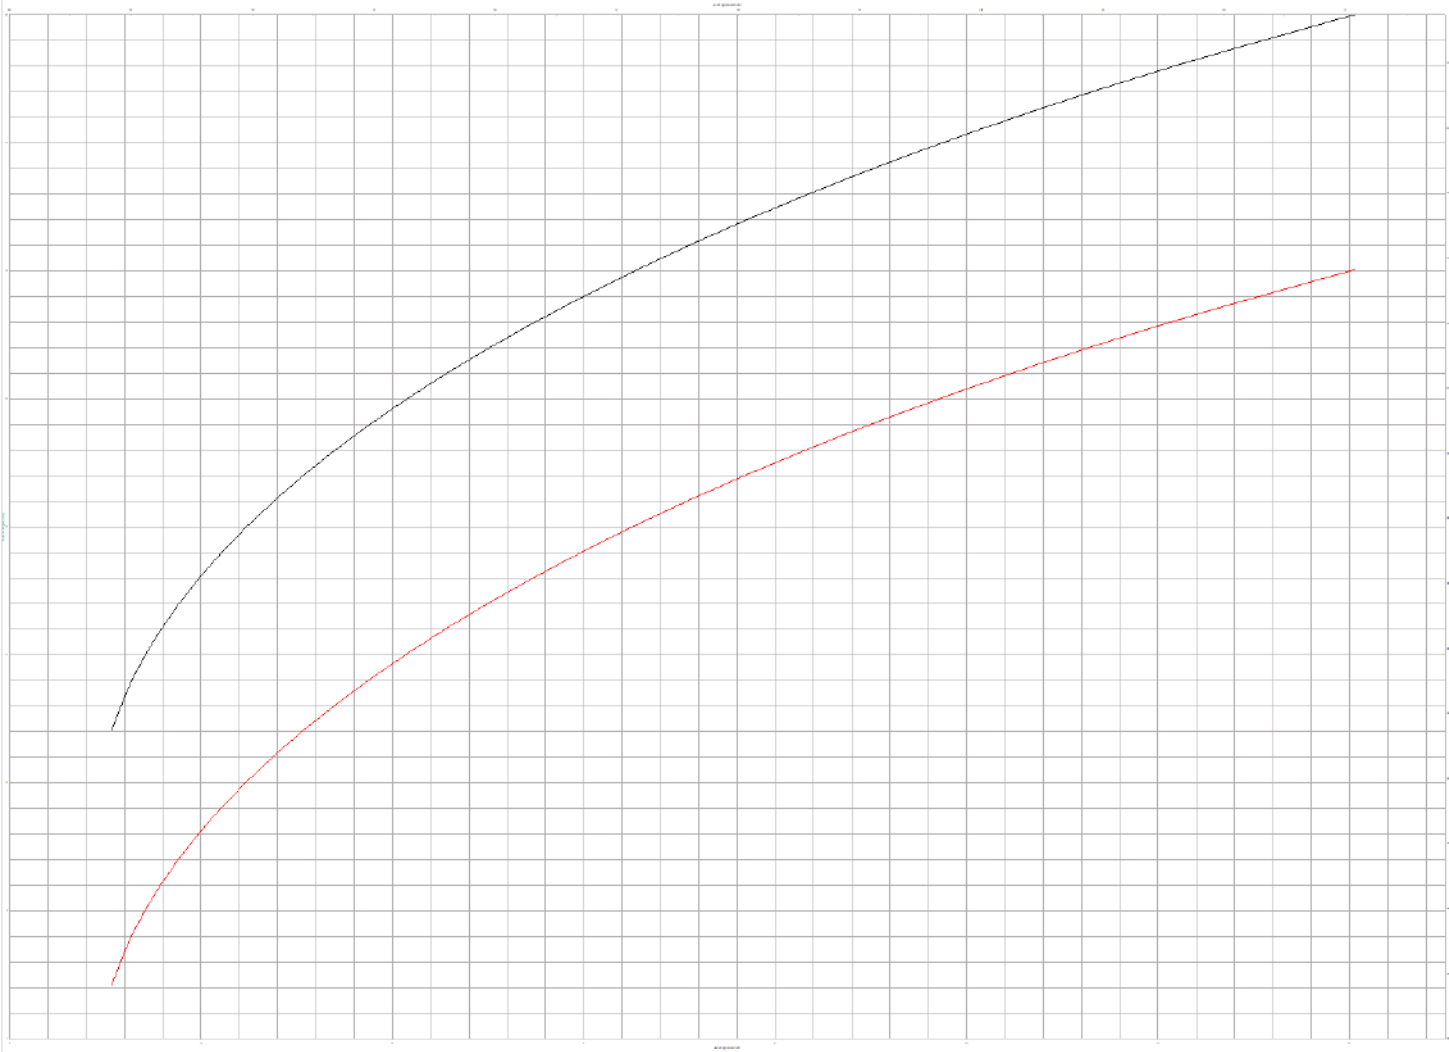

If the EAL is being recessed then the figure for mantle piece depth increases by the recess depth value.

If the upper screen edge is not flush with the EAL wall plate (as shown in views right) then the wall plate height below mantle increases by the offset amount.

Due to mechanical tolerances between moving components, mechanisms may experience a level deviation of up to +/- 0.15deg between the in and out positions.

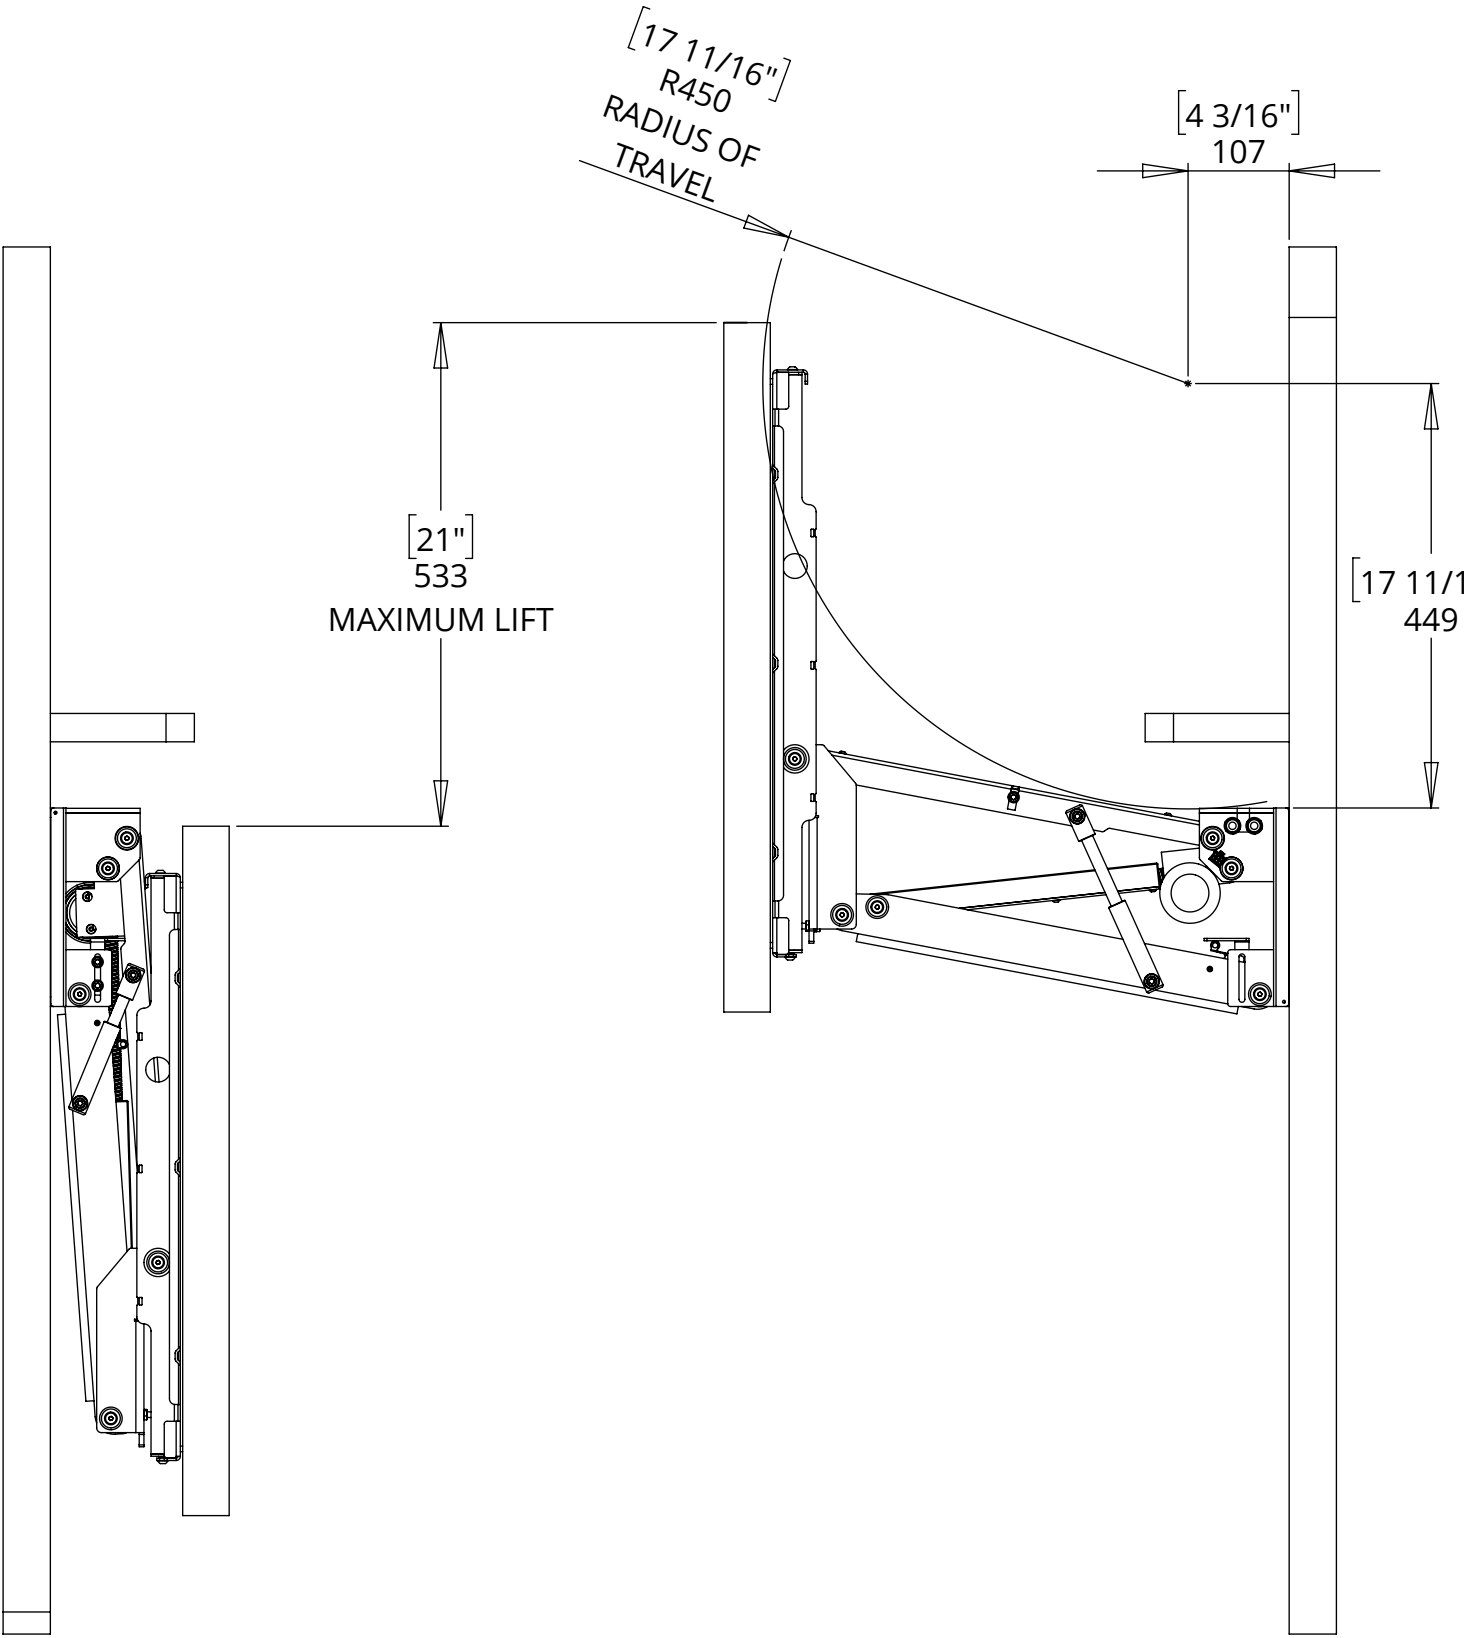

EAL

ELECTRIC ADVANCE & LIFT BRACKET




future automation

SCREEN MOUNTING


Remove screen mount as shown below and assemble to screen.

Reassemble screen mount to mechanism in reverse of disassembly. Route cables as shown.



BOLT MOUNT TO SCREEN

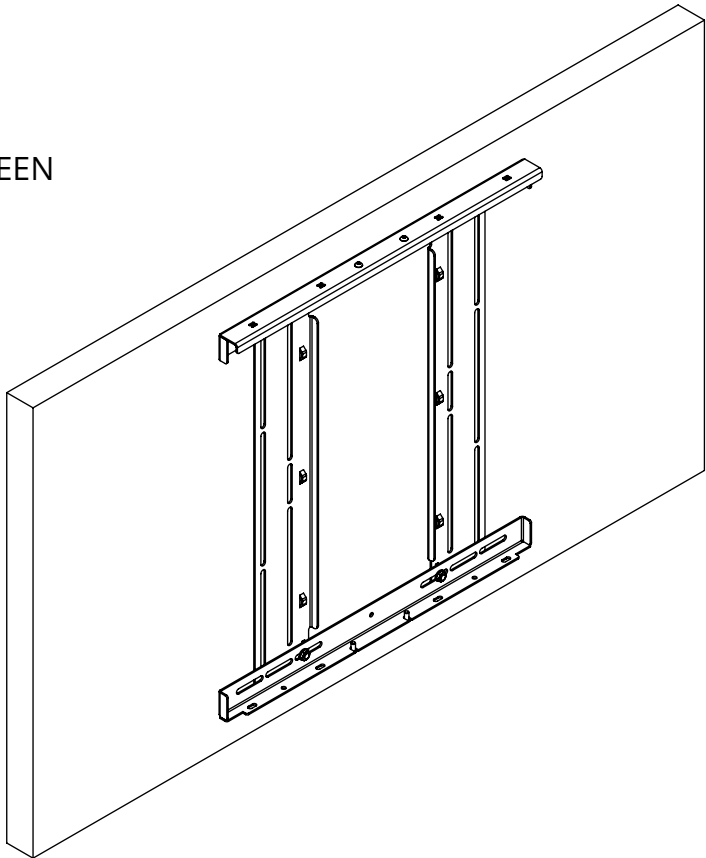

HOOK ON AND RE-INSERT
M6 BOLTS

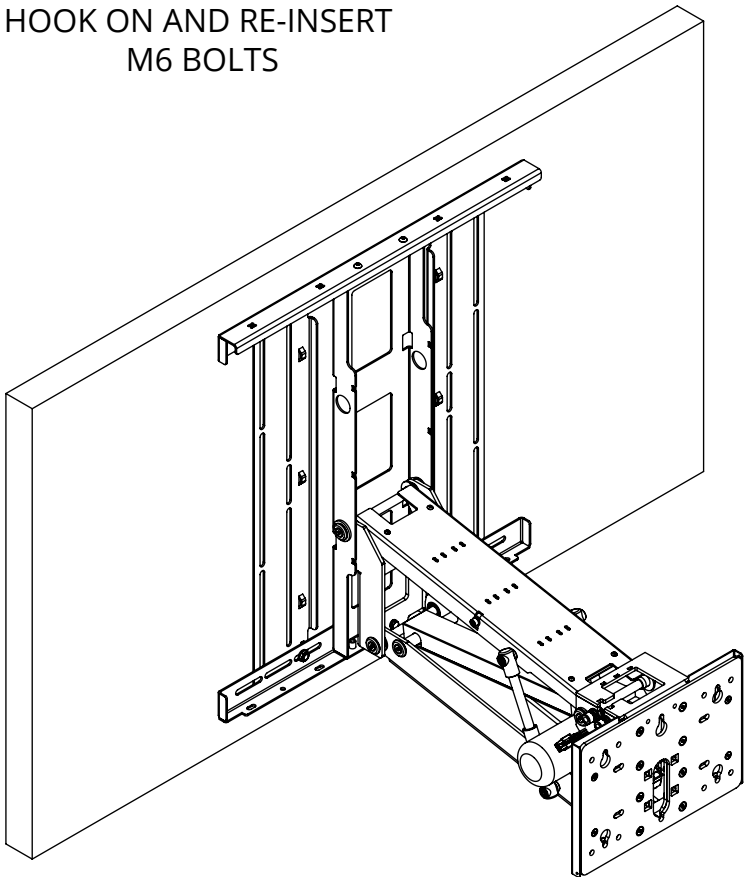

TILT AND UNHOOK MOUNT PLATE

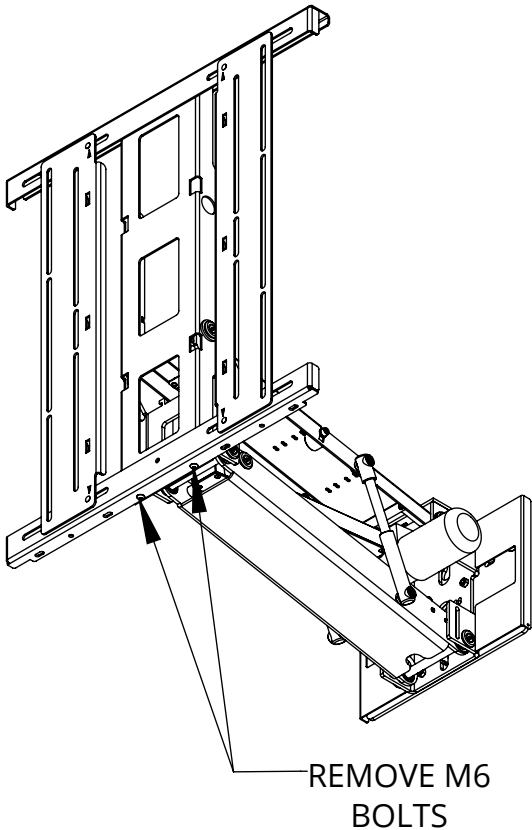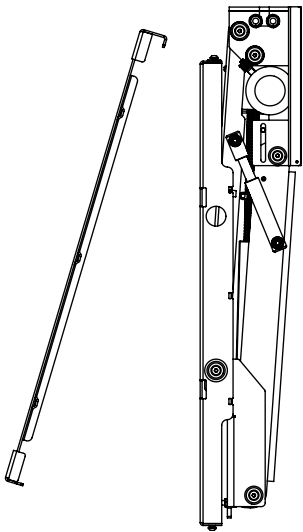


EAL

ELECTRIC ADVANCE & LIFT BRACKET

POSITION ADJUSTMENT

The EAL can be adjusted to fine tune the up and down positions.


Refer to instructions for more information on switch adjustment.

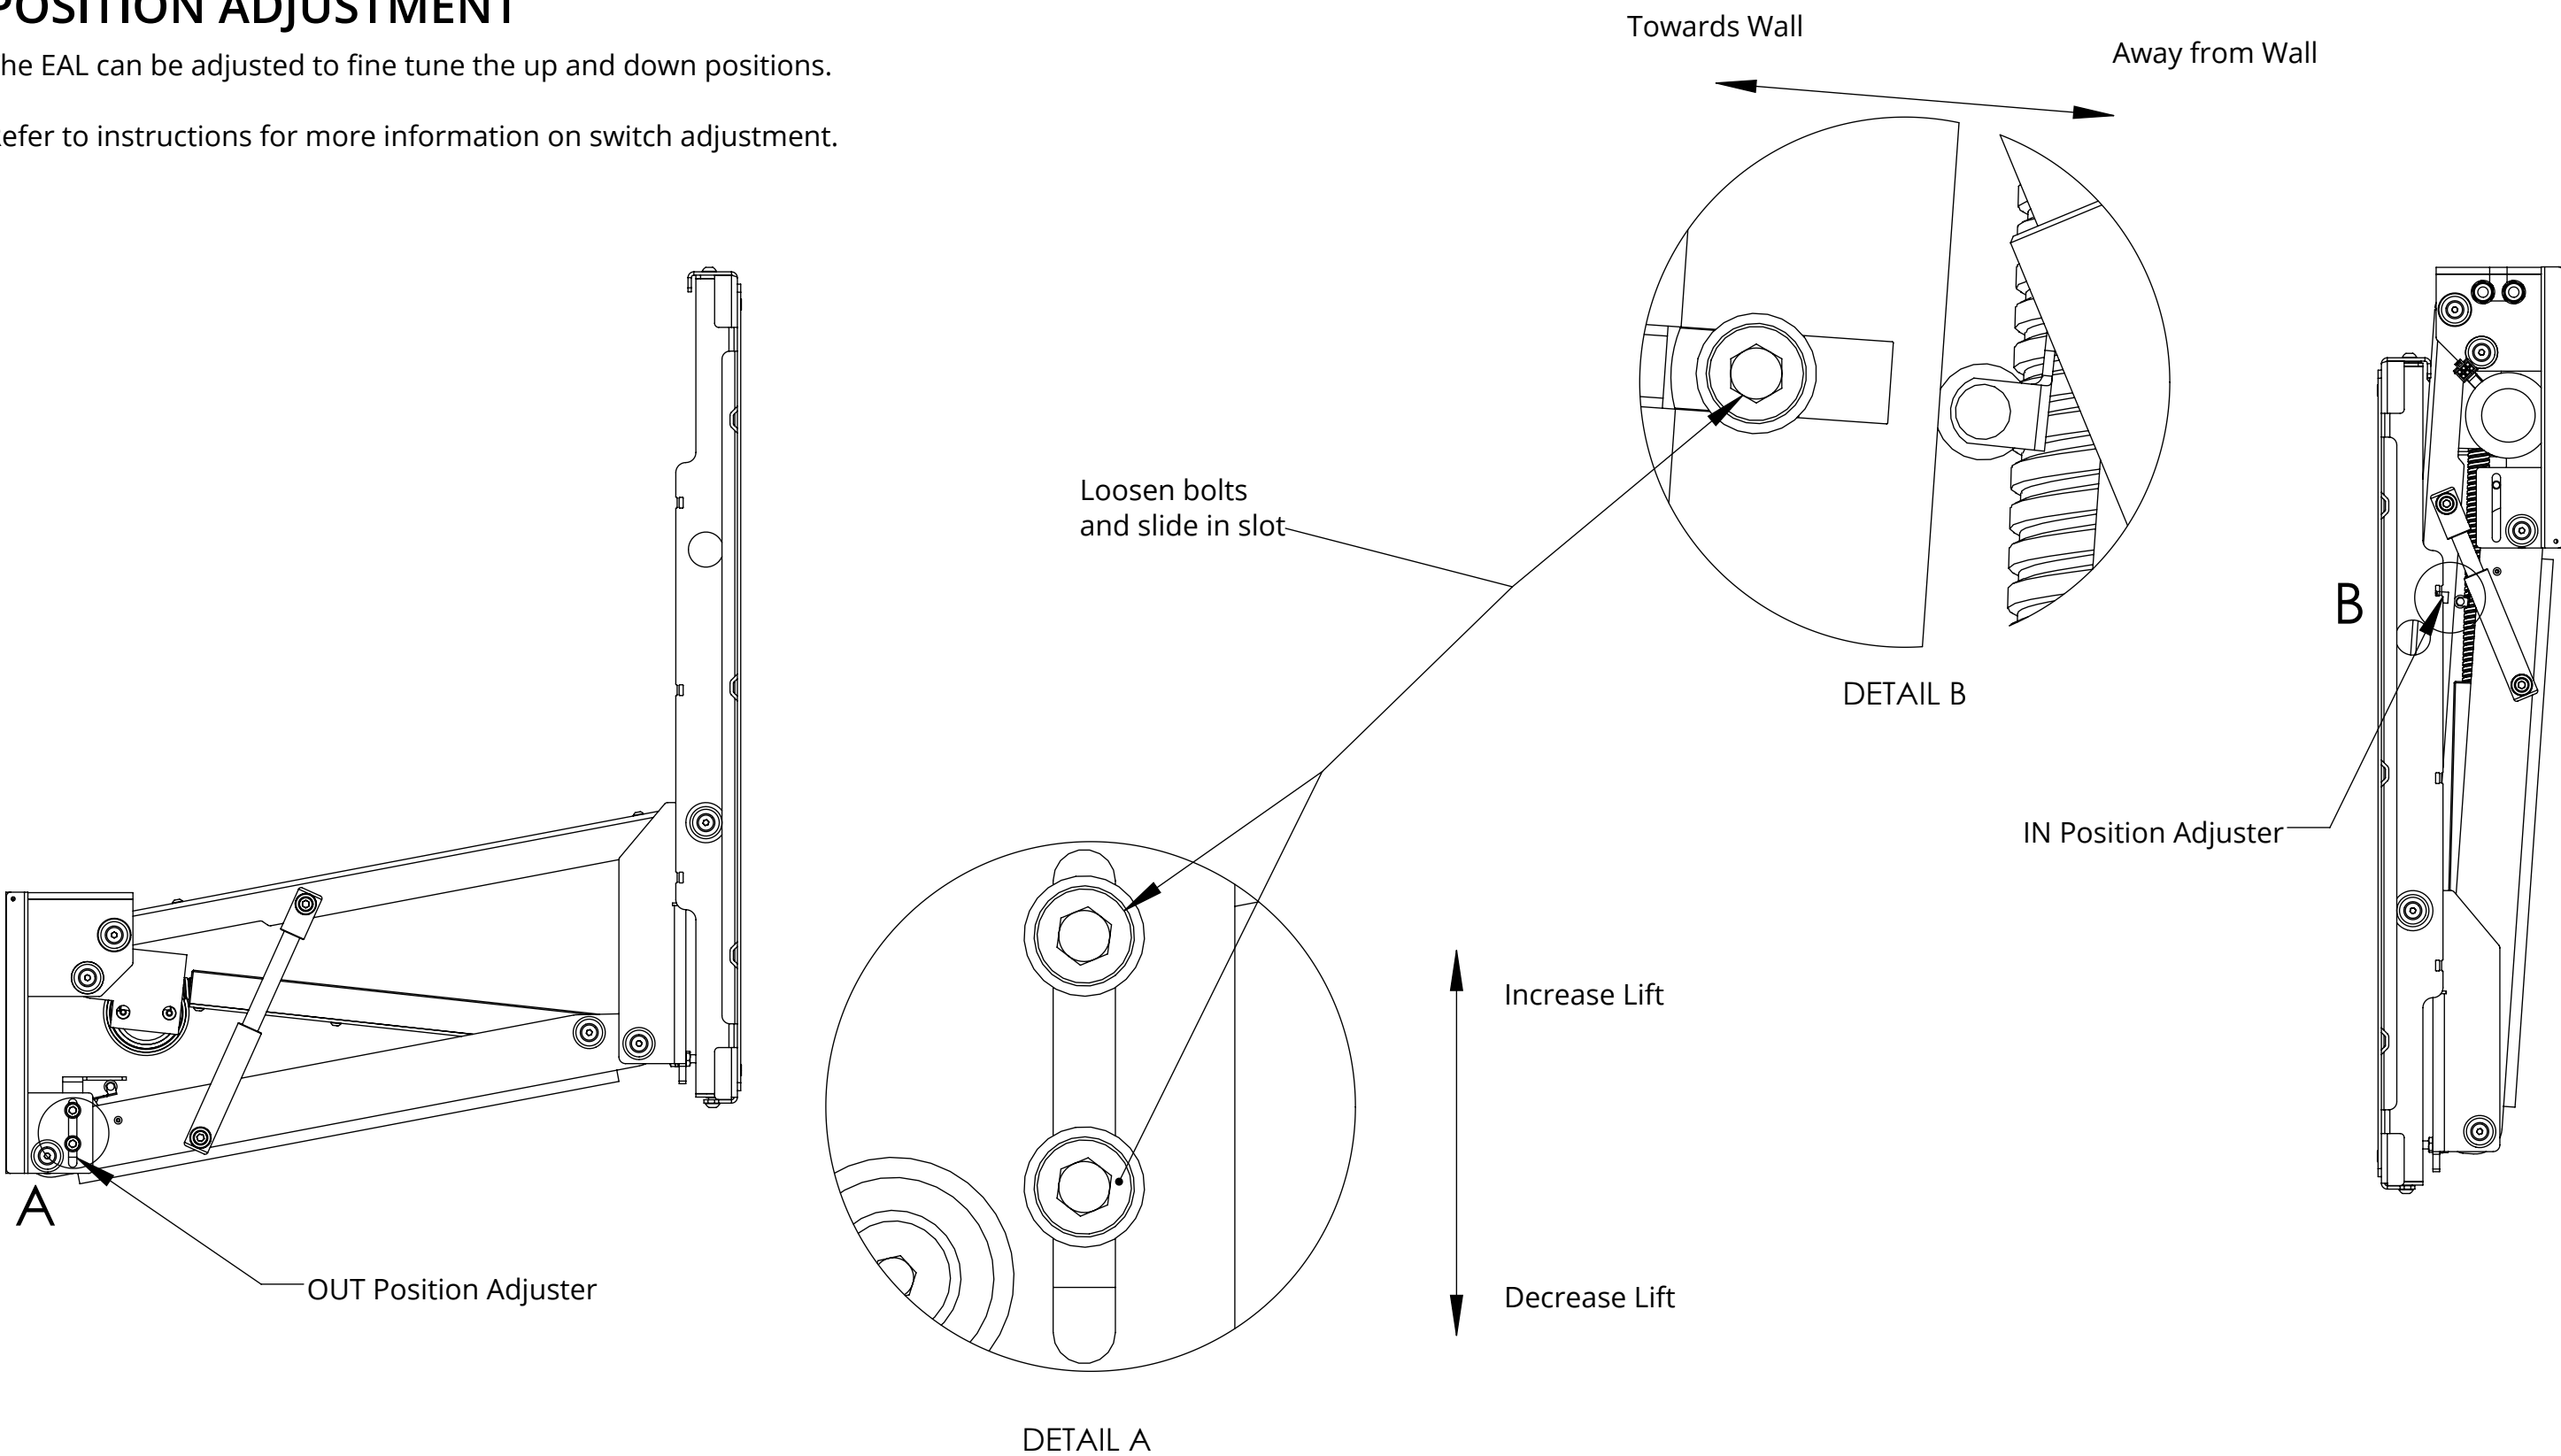

EAL

ELECTRIC ADVANCE & LIFT BRACKET



DOWN POSITION DIMENSIONS

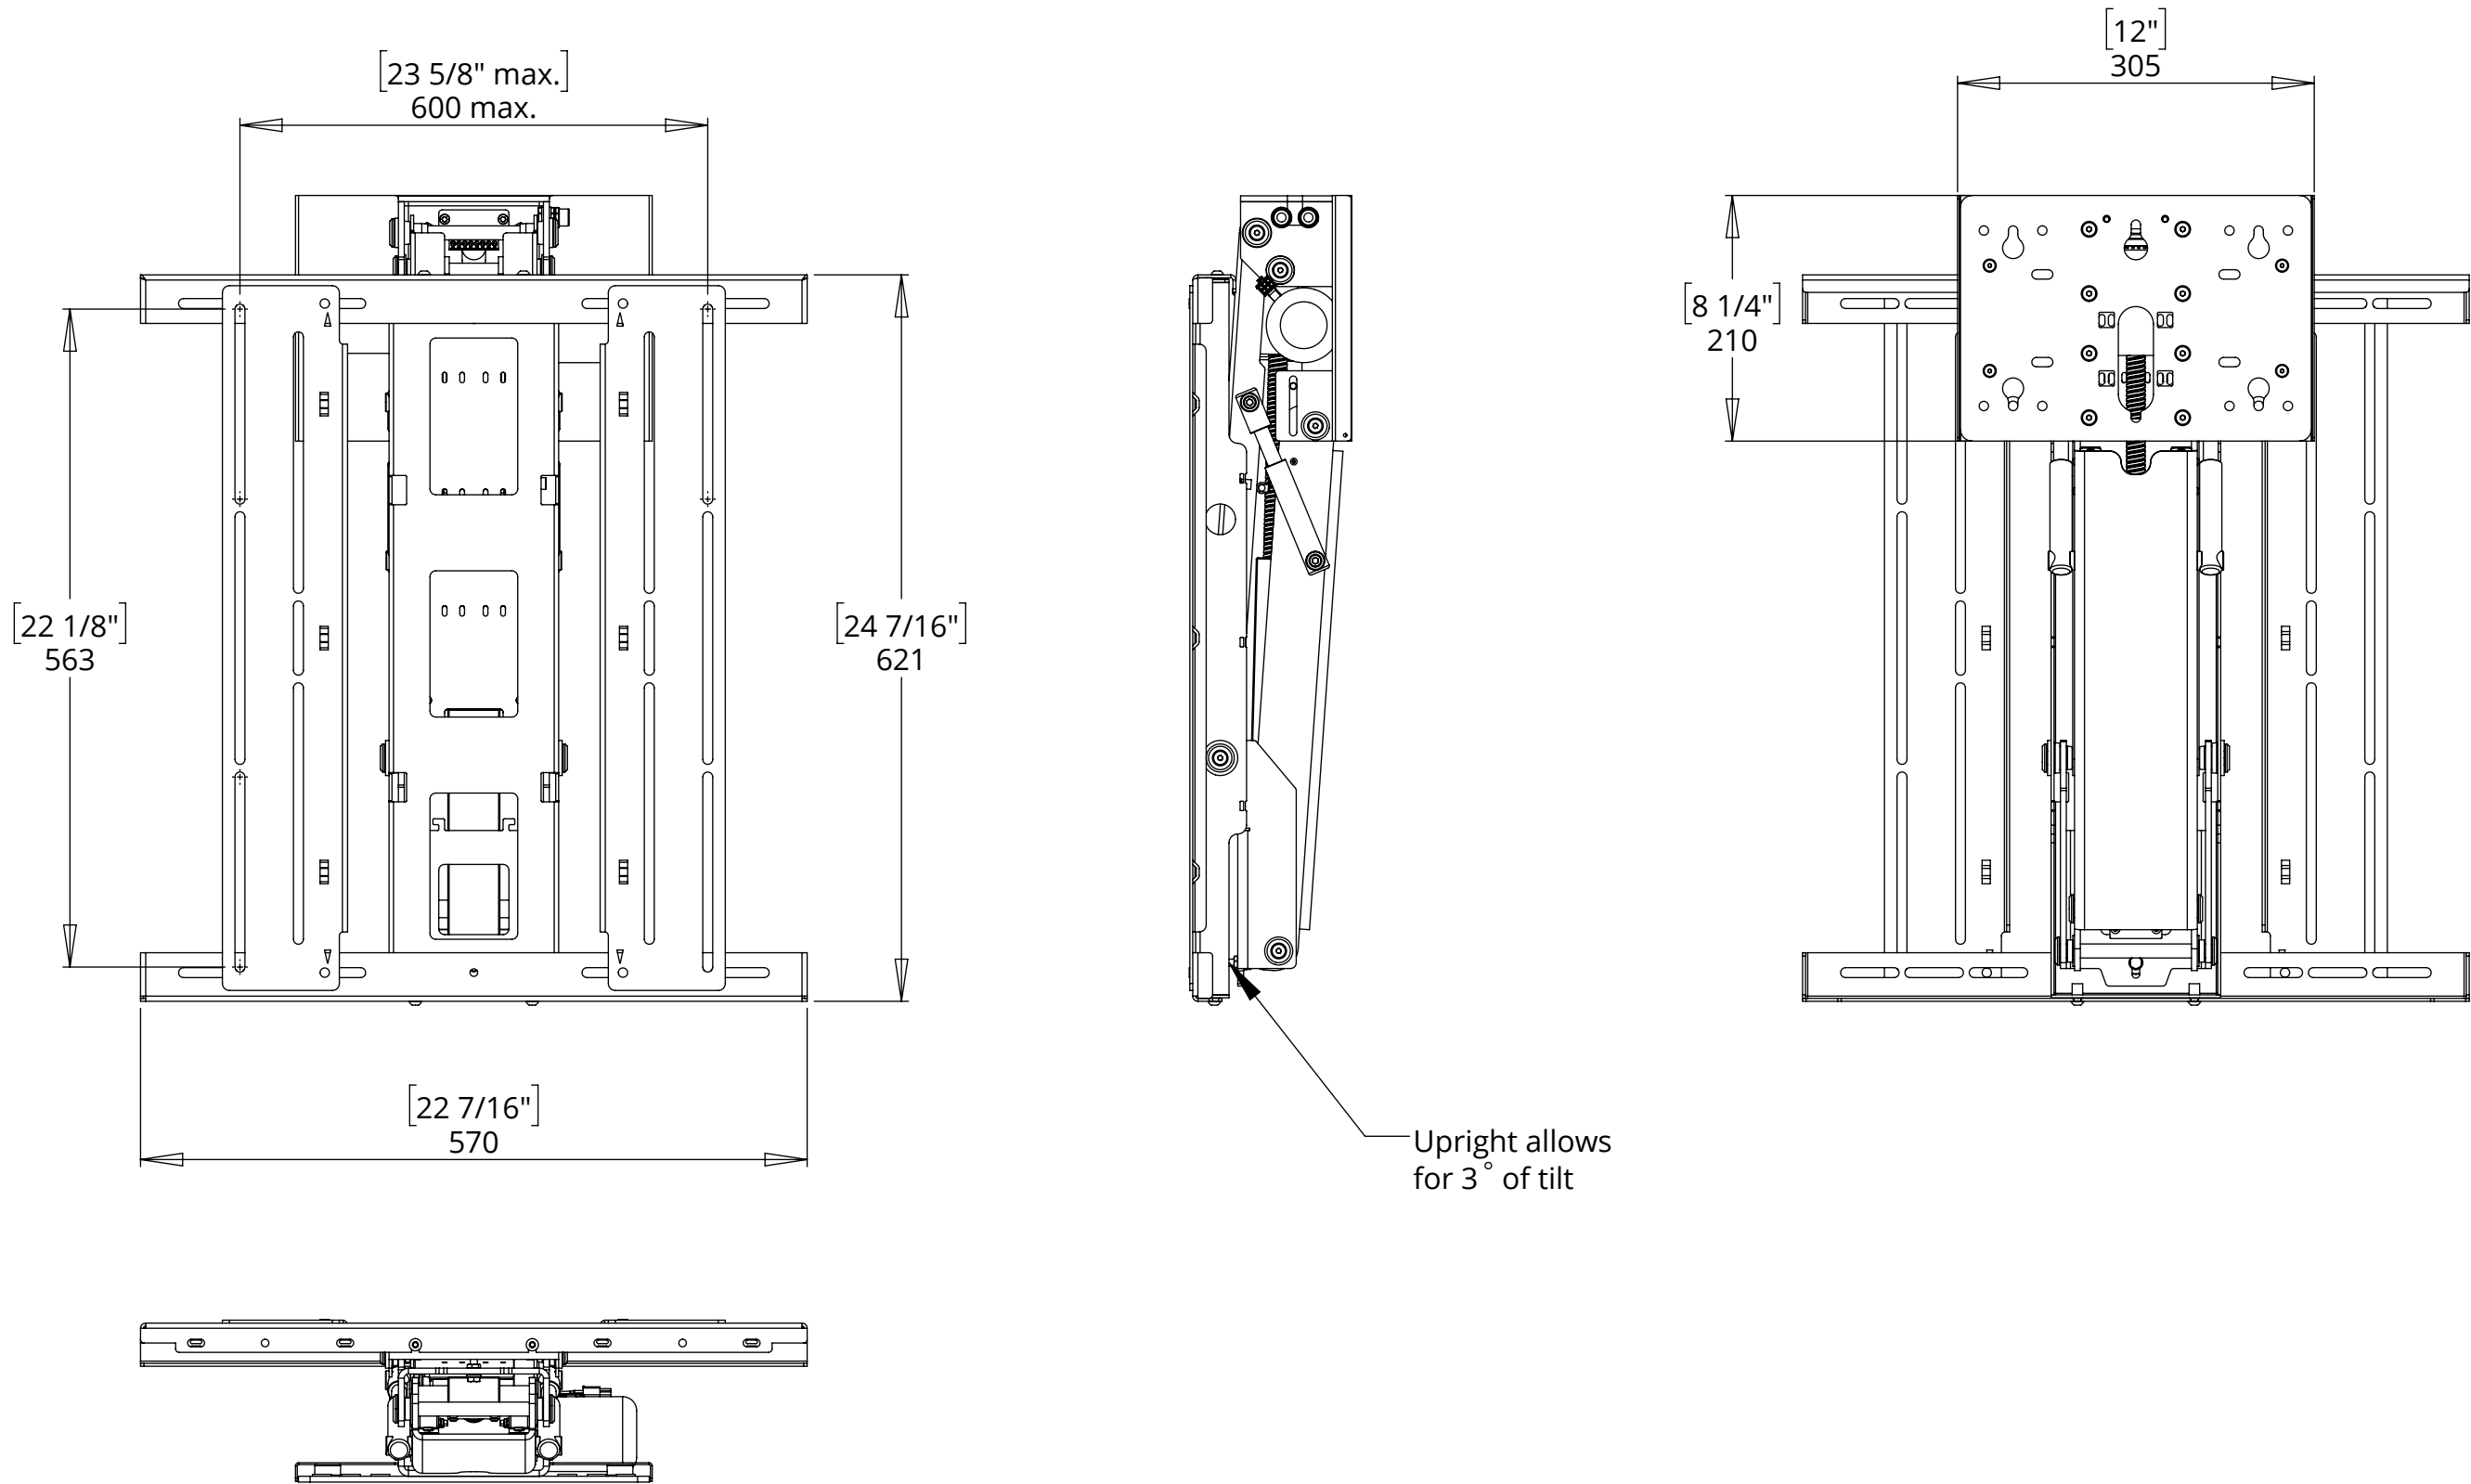

EAL

ELECTRIC ADVANCE & LIFT BRACKET

UP POSITION DIMENSIONS

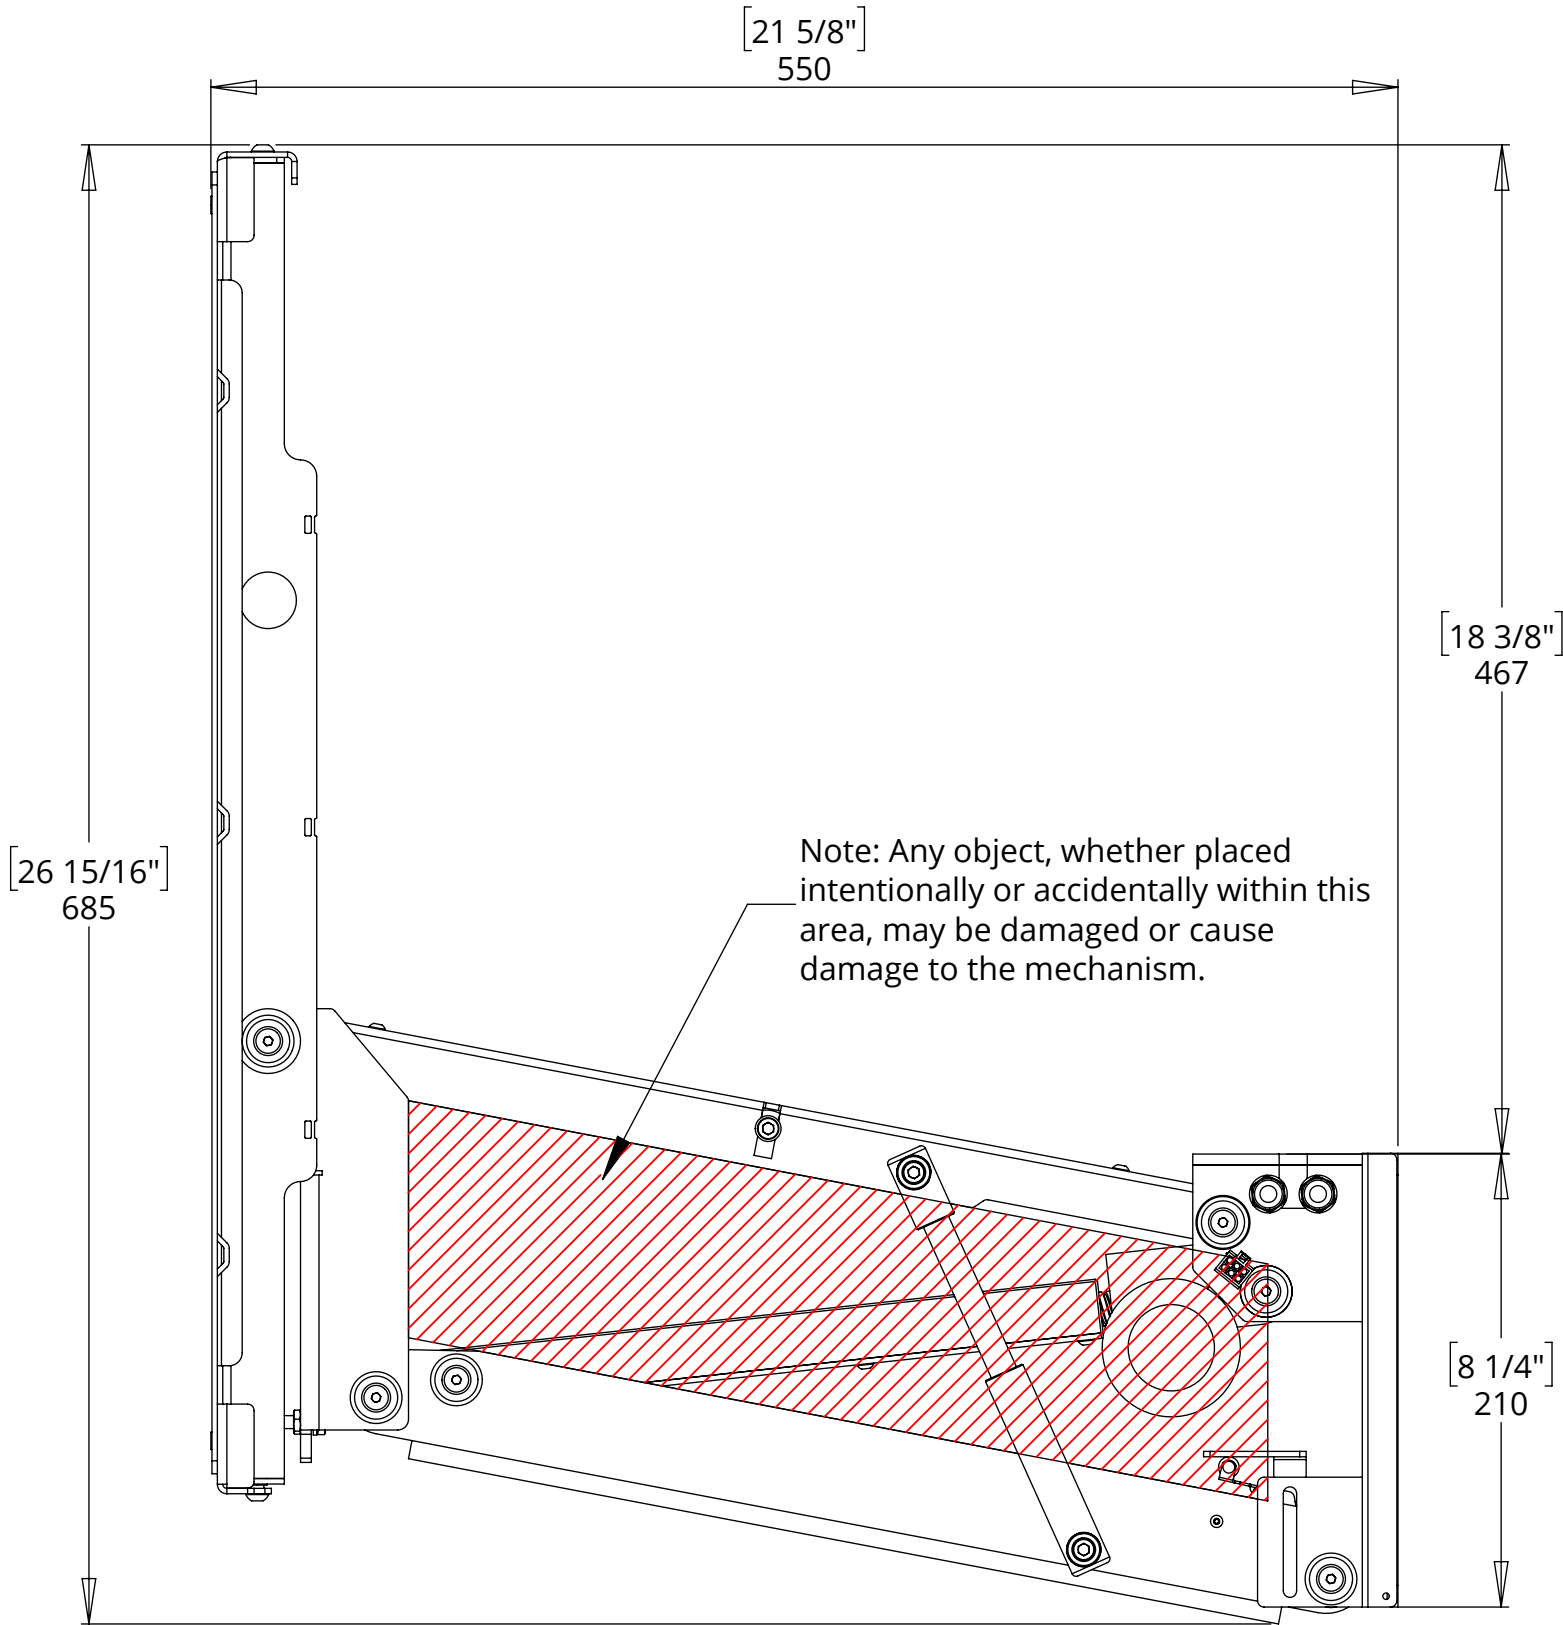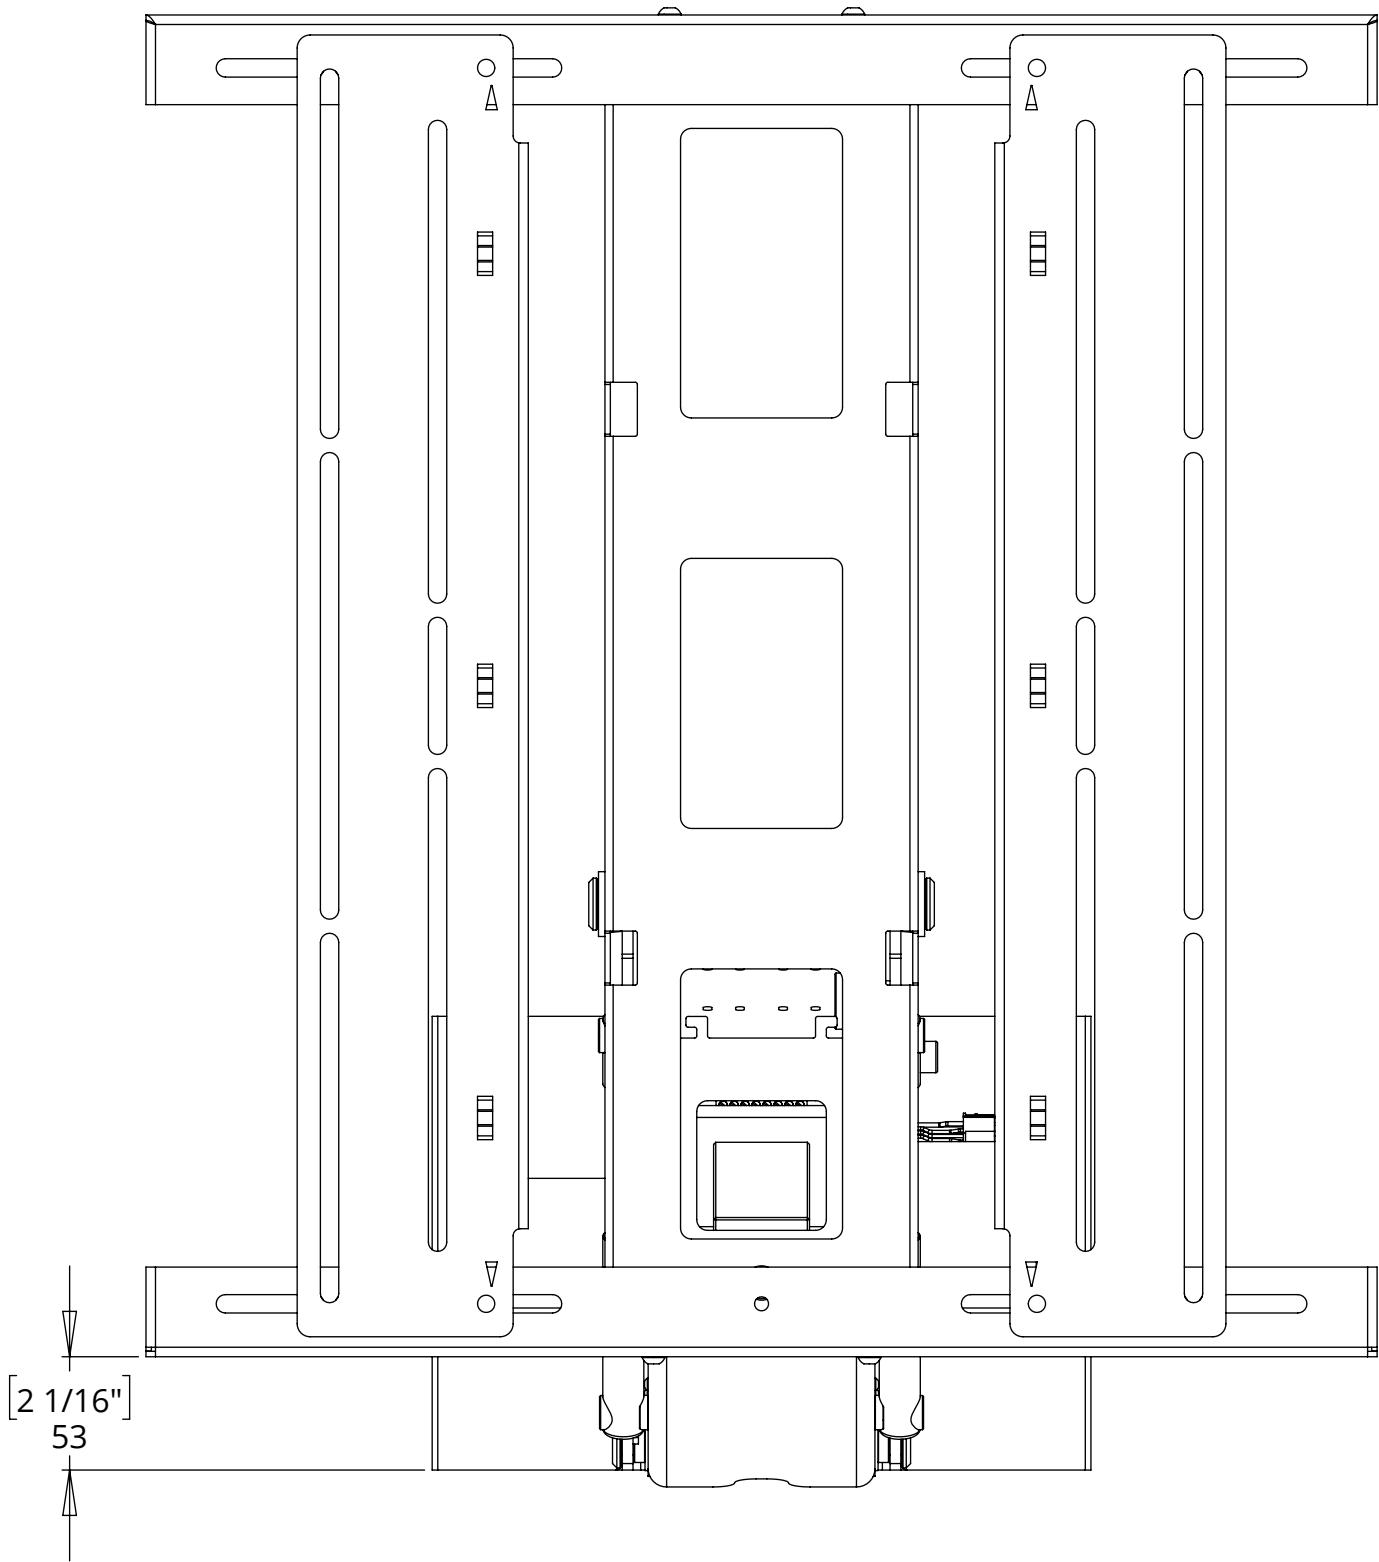

EAL

ELECTRIC ADVANCE & LIFT BRACKET



future automation

WALL PLATE DIMENSIONS

