
I-LSM-BE 2
INVERTED LIFT SYSTEM FOR BOX ENCLOSURE

future automation

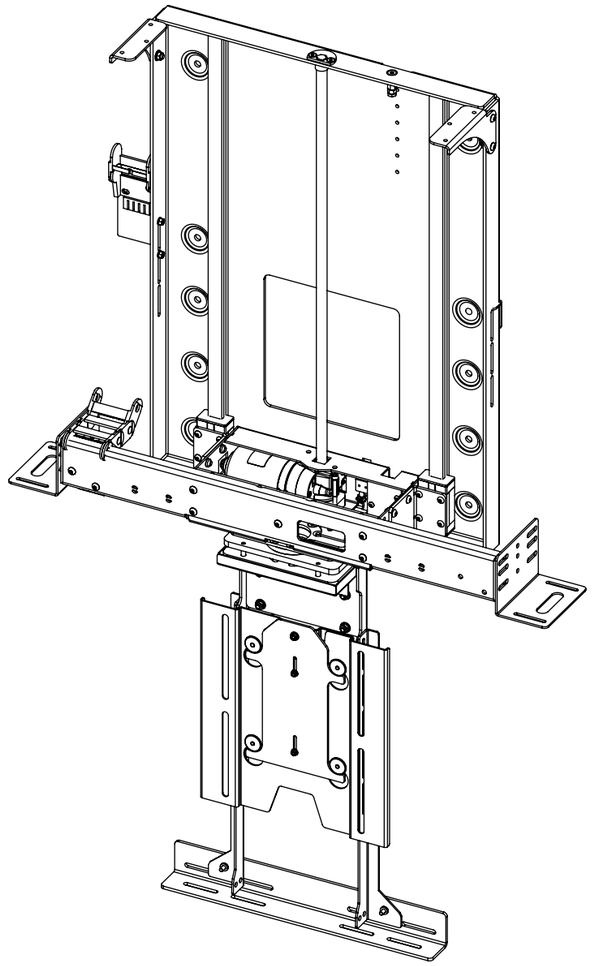

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 013
SHEET 1

I-LSM-BE 2
INVERTED LIFT SYSTEM FOR BOX ENCLOSURE

future automation

SPECIFICATION	MEASUREMENTS
Maximum Screen Height	540mm (21 1/4")
Maximum Lifting Capacity	50kg (110lbs)
Maximum Lifting Capacity (Marine)	30kg (66lbs)
Internal Cabinet Height	694mm (27 5/16")
Decibel Rating	52 dB
Packaging Dimensions	870 x 840 x 300mm (34 1/4 x 33 1/16 x 11 13/16")
Shipping Weight	33kg (73lbs)
Movement Type	Motorised
Power Supply Required	110V - 240V AC
Power Consumption	250 - 500W
Power Consumption Standby	3W
Mounting Patterns Supported	VESA 200 W x 200 H
Control Options	IR Remote, RS232, Contact Closure, RF Available
Product Options / Features	Specific B&O and Loewe mounts / adapters, Custom RAL paint finishes
Package Contents	Mechanism, IR remote control
Marine Suitable	Yes

I-LSM-BE 2
INVERTED LIFT SYSTEM FOR BOX ENCLOSURE


future automation

CABLE ROUTING


The LSM has an easily removable Mount Cover that cables from the screen can be routed underneath. Cables then travel through the centre of the Mount Boss and into the beam. Cables must be routed carefully to prevent any interference with the LSM beam as it operates.


Screen and Mechanism cables should be routed to a control box outside of the cabinet via an opening in the back of the cabinet or a conduit leading to the bottom.

SCREEN CABLES
MECHANISM CABLES
POWER CABLE

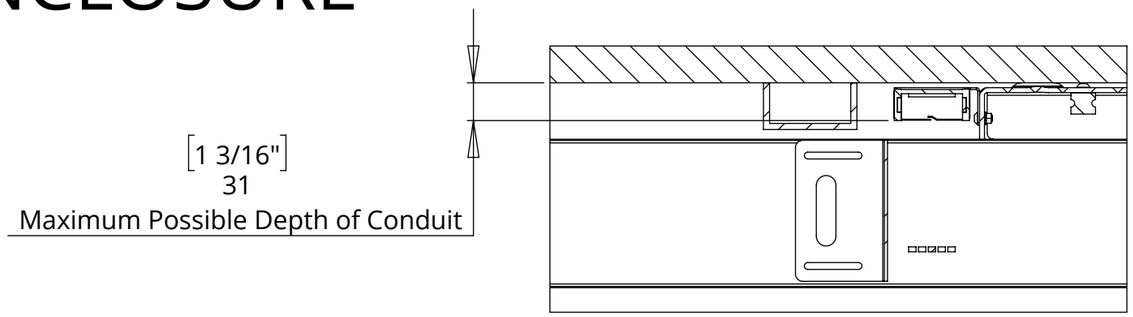

Bottom View

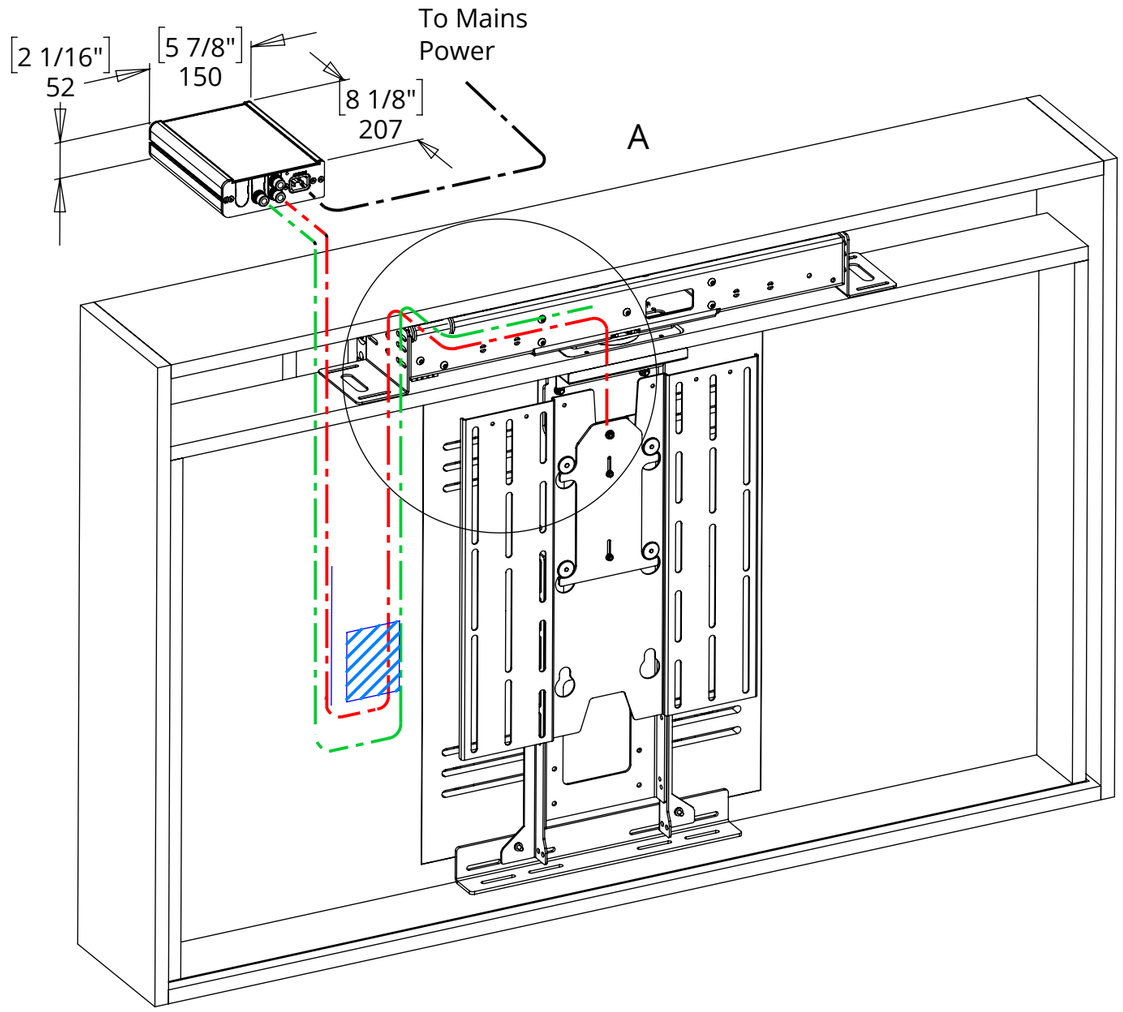

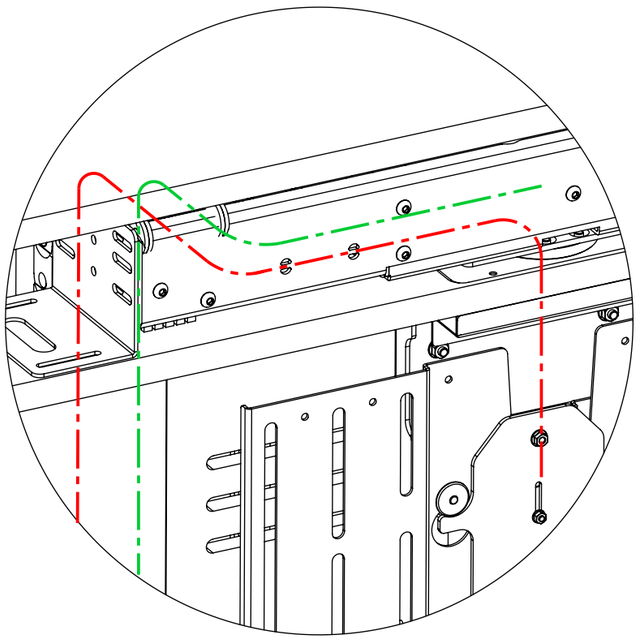


DETAIL A

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


TECHNICAL SHEET
ISSUE 013
SHEET 3


I-LSM-BE 2
INVERTED LIFT SYSTEM FOR BOX ENCLOSURE

MECHANISM DOWN - IN CABINET

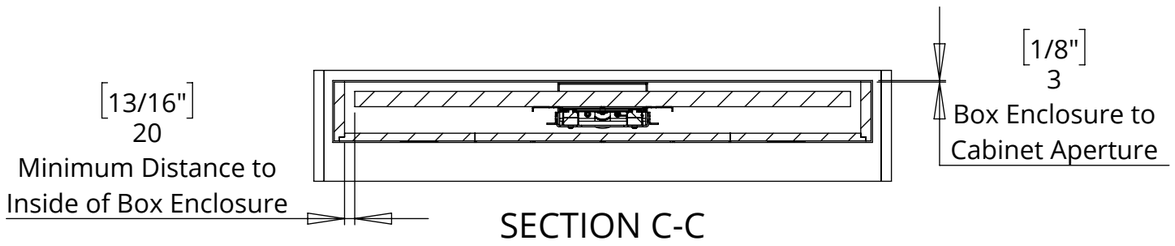

SECTION C-C

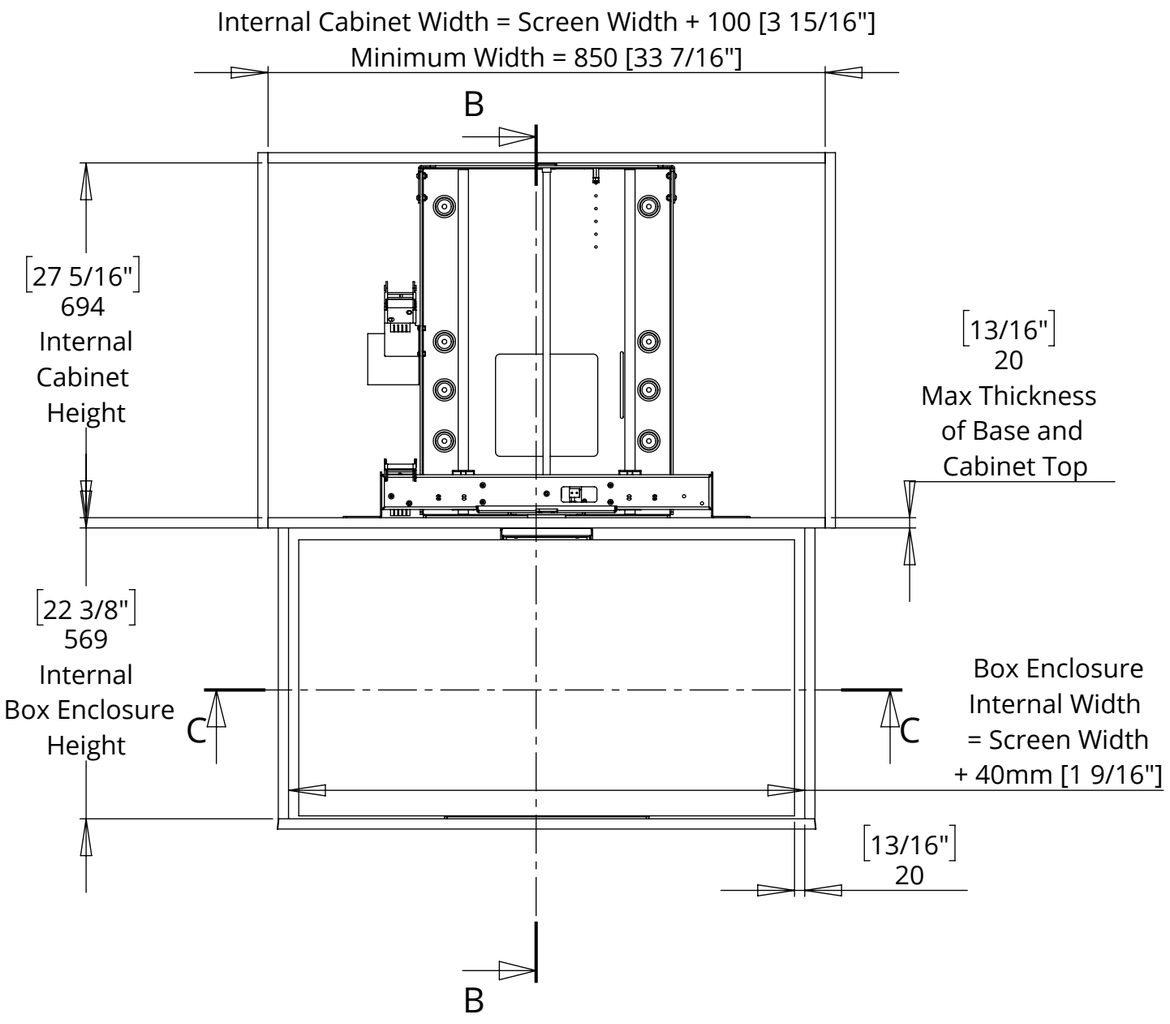

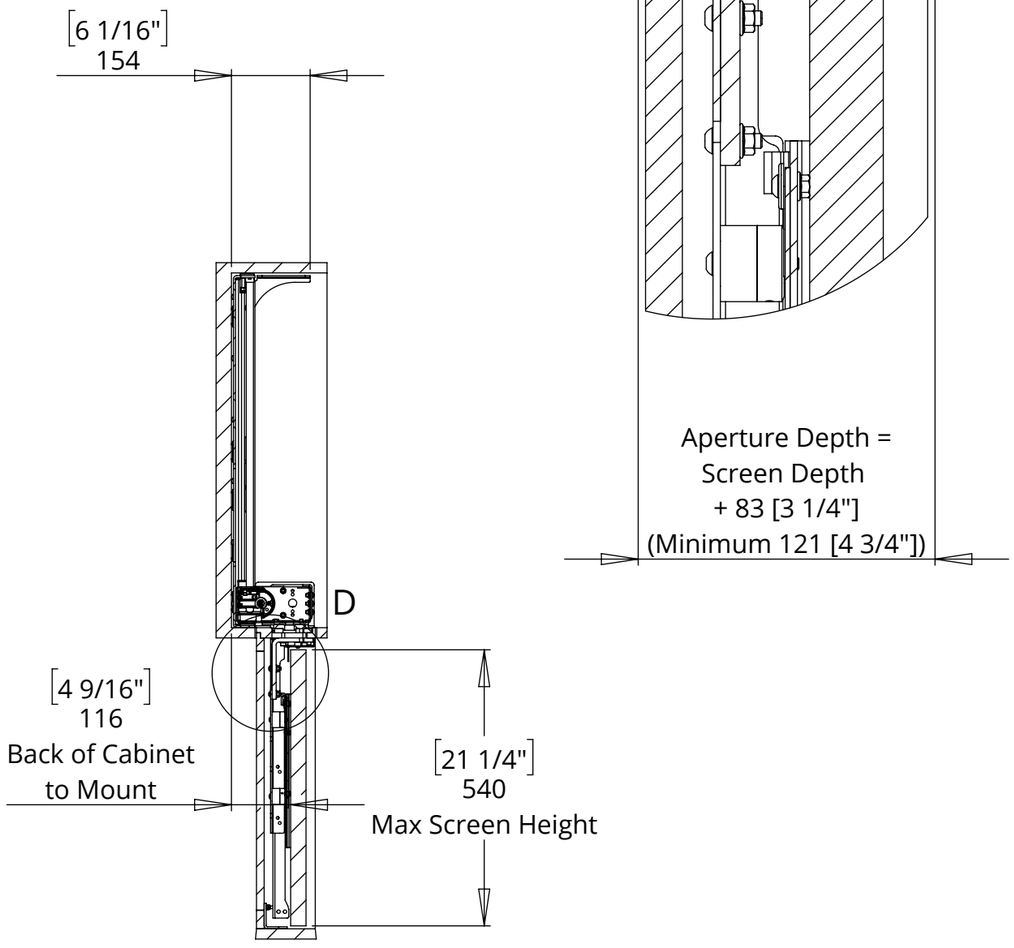

SECTION B-B


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 013
SHEET 4

I-LSM-BE 2
INVERTED LIFT SYSTEM FOR BOX ENCLOSURE


future automation

MECHANISM UP - IN CABINET

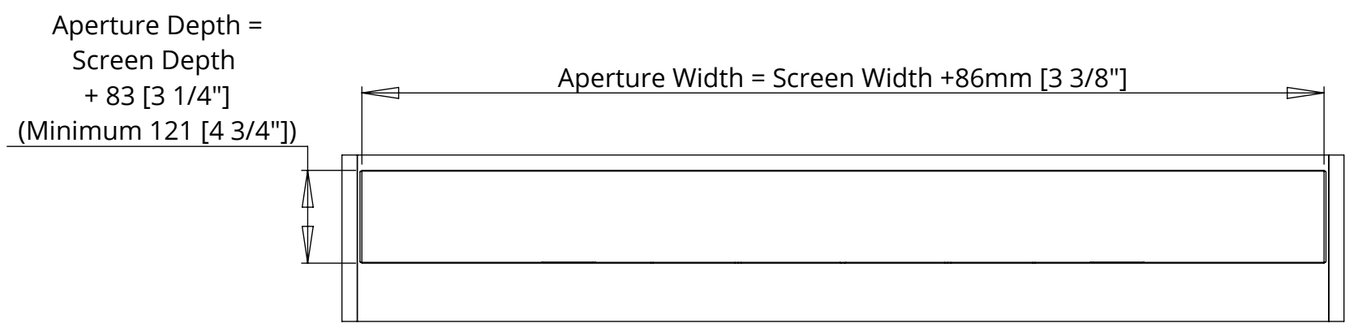



Shown with tapered Box Enclosure Lid in square Cabinet Aperture.

A tapered Cabinet Aperture can be used to improve the fit.

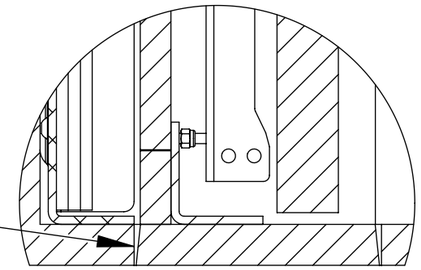

DETAIL F

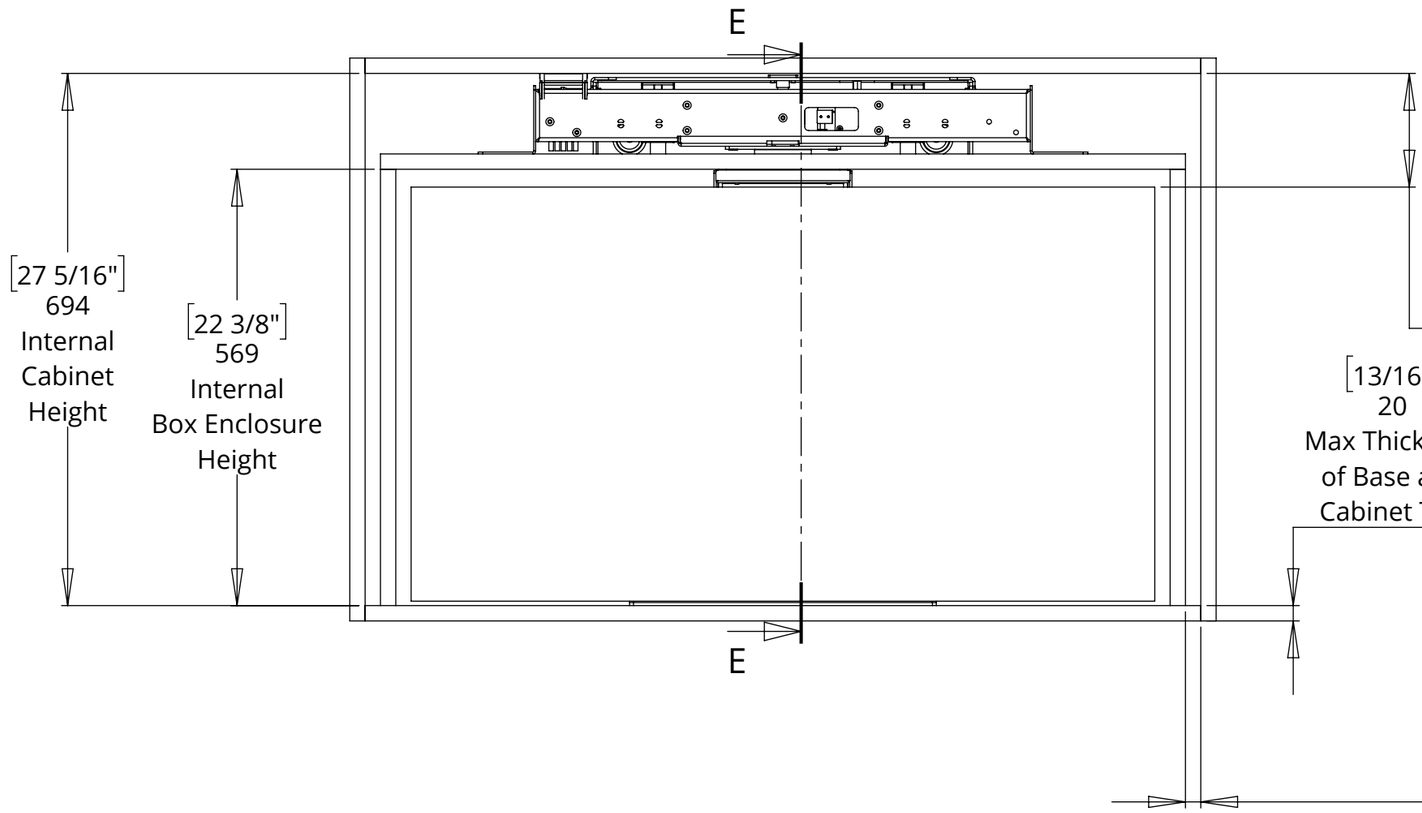

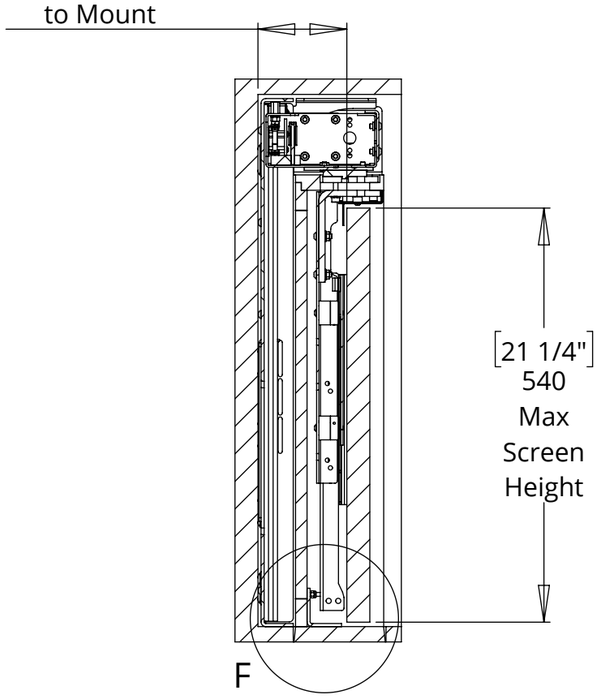

SECTION E-E

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 013
SHEET 5


I-LSM-BE 2
INVERTED LIFT SYSTEM FOR BOX ENCLOSURE


future automation

BASE PANEL AND BOX ENCLOSURE LID DETAILS


NOTE: A tapered Box Enclosure Lid creates a good fit in the Cabinet Aperture and helps the Box Enclosure to locate within the cabinet.


BOX ENCLOSURE LID (TAPERED) - TOP VIEW

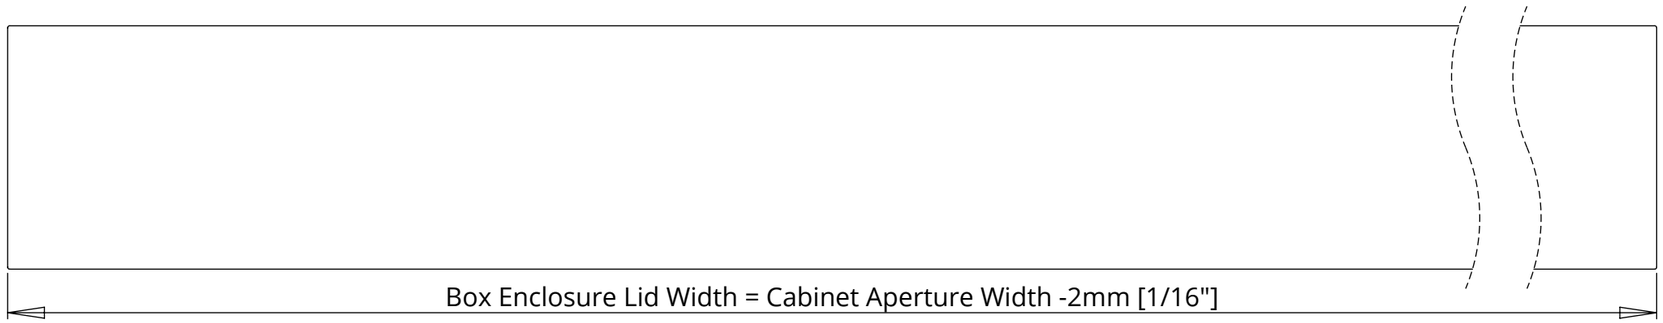

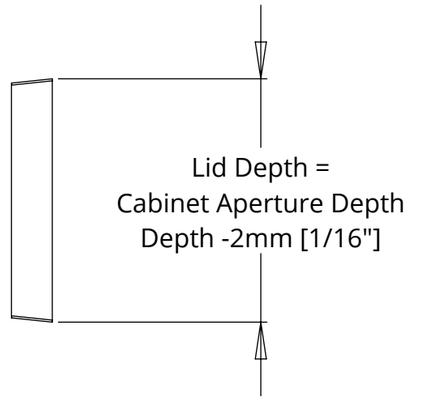


BASE PANEL - TOP VIEW

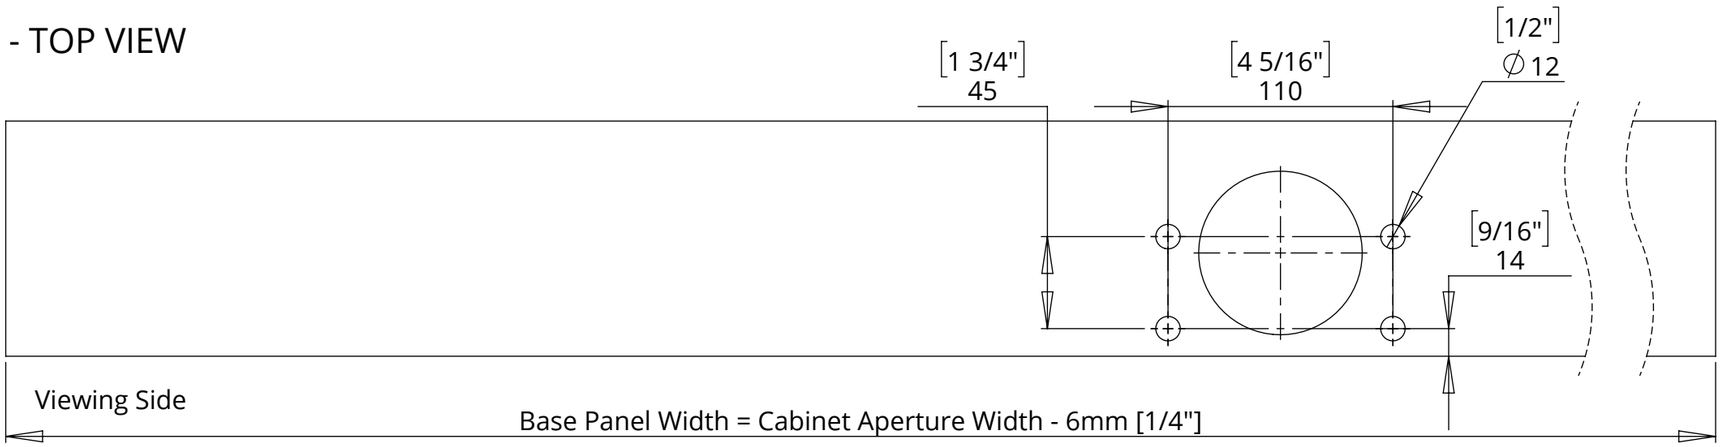


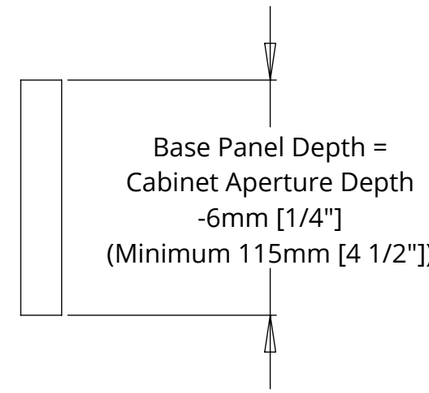

BASE PANEL - BOTTOM VIEW

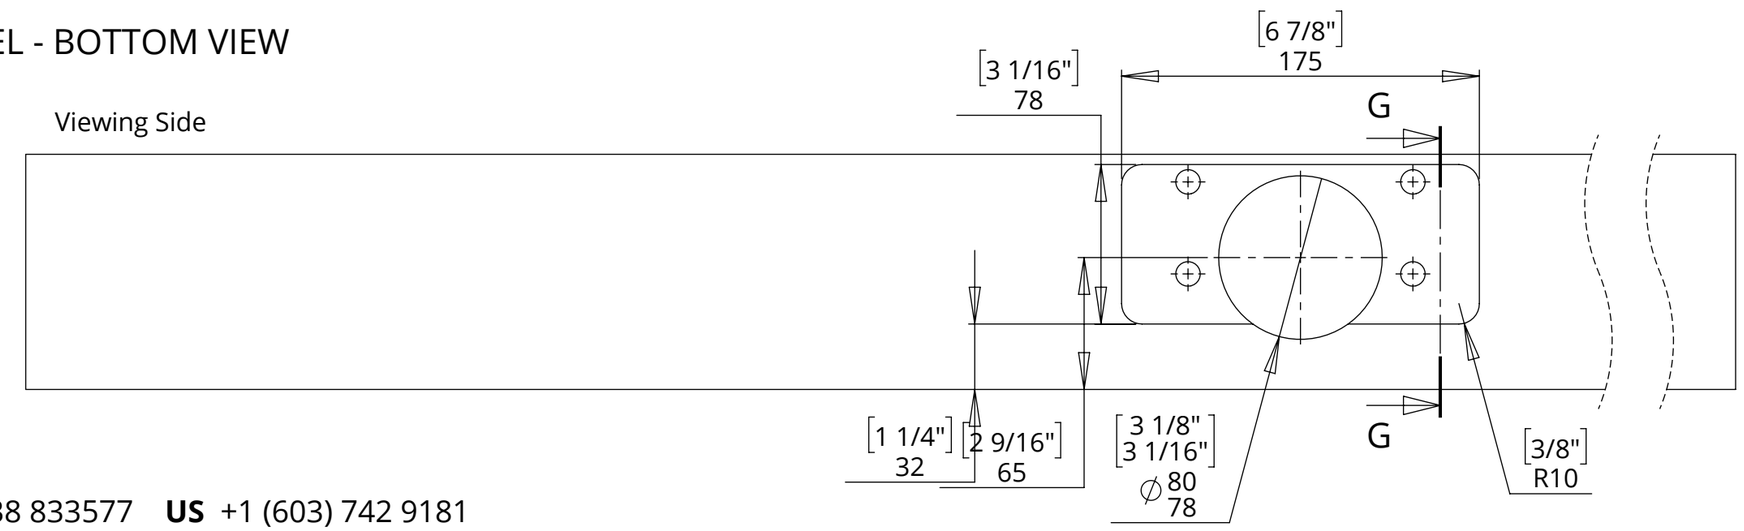

SECTION G-G




UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 013
SHEET 6


I-LSM-BE 2
INVERTED LIFT SYSTEM FOR BOX ENCLOSURE

future automation

BOX ENCLOSURE POSITION ADJUSTMENT

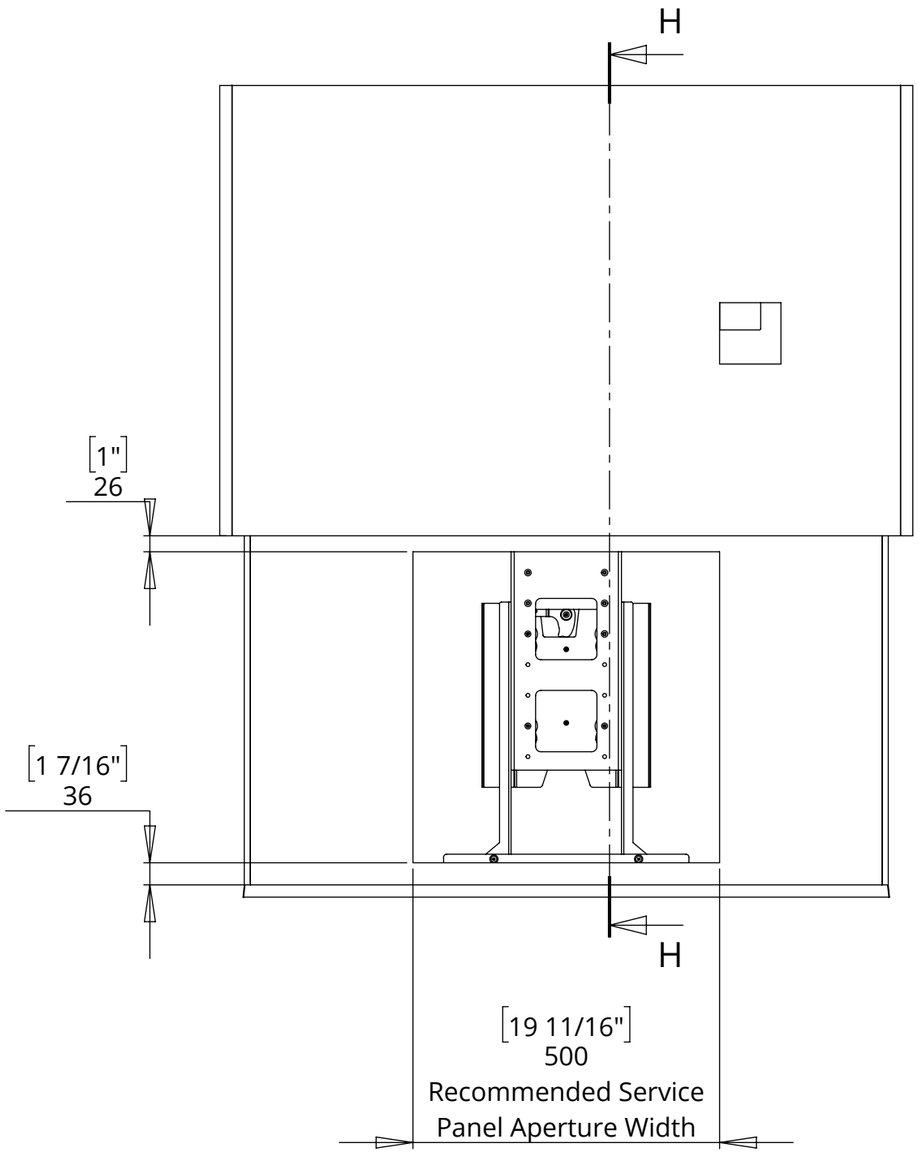



SECTION H-H

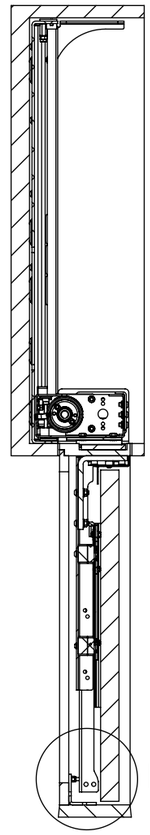

±5mm Adjustment

The countersink bolts enable fine tuning the position of the box enclosure relative to the uprights

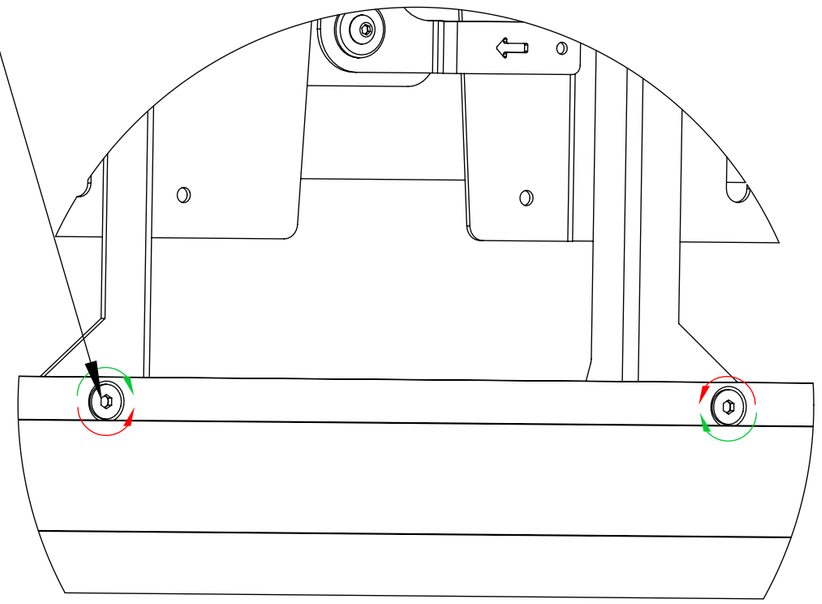

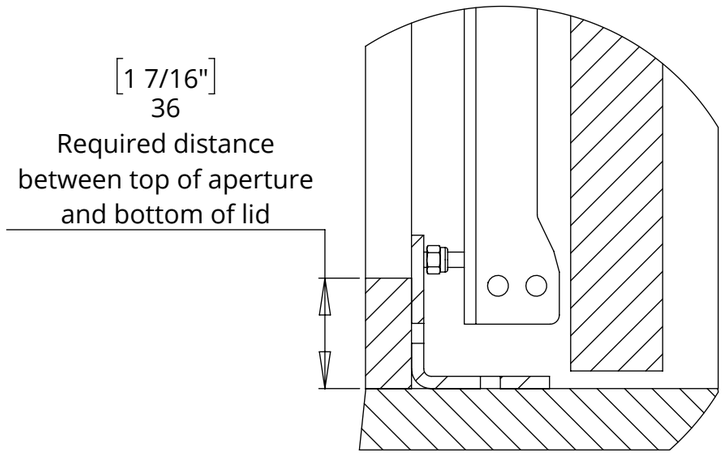

DETAIL I


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET

TECHNICAL SHEET
ISSUE 013
SHEET 7


I-LSM-BE 2
INVERTED LIFT SYSTEM FOR BOX ENCLOSURE


SCREEN MOUNT ADJUSTABILITY

A standard adjustable height VESA 200 mount is included.




V200

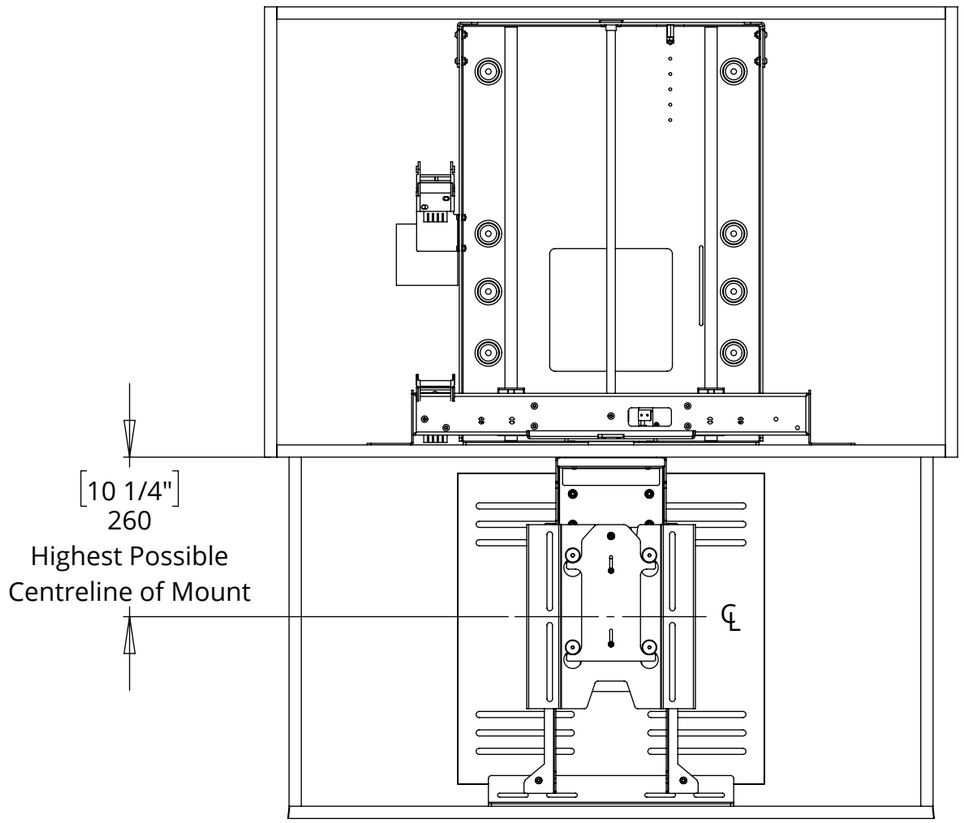

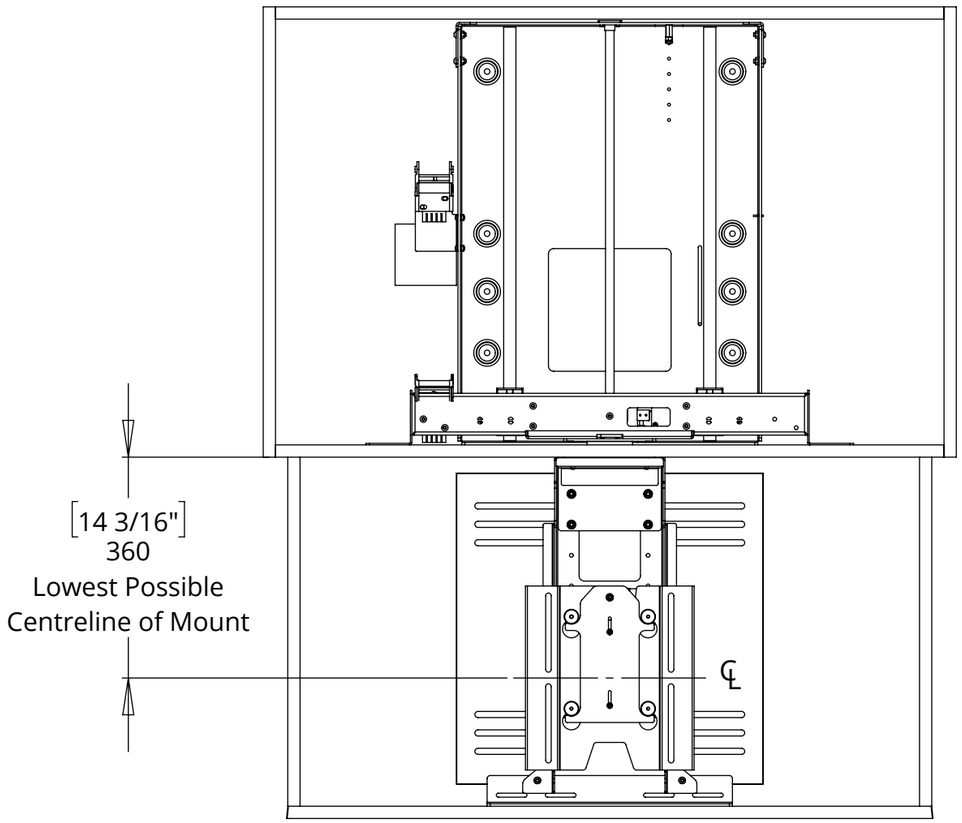

I-LSM-BE 2
INVERTED LIFT SYSTEM FOR BOX ENCLOSURE

MECHANISM INSTALLATION OVERVIEW

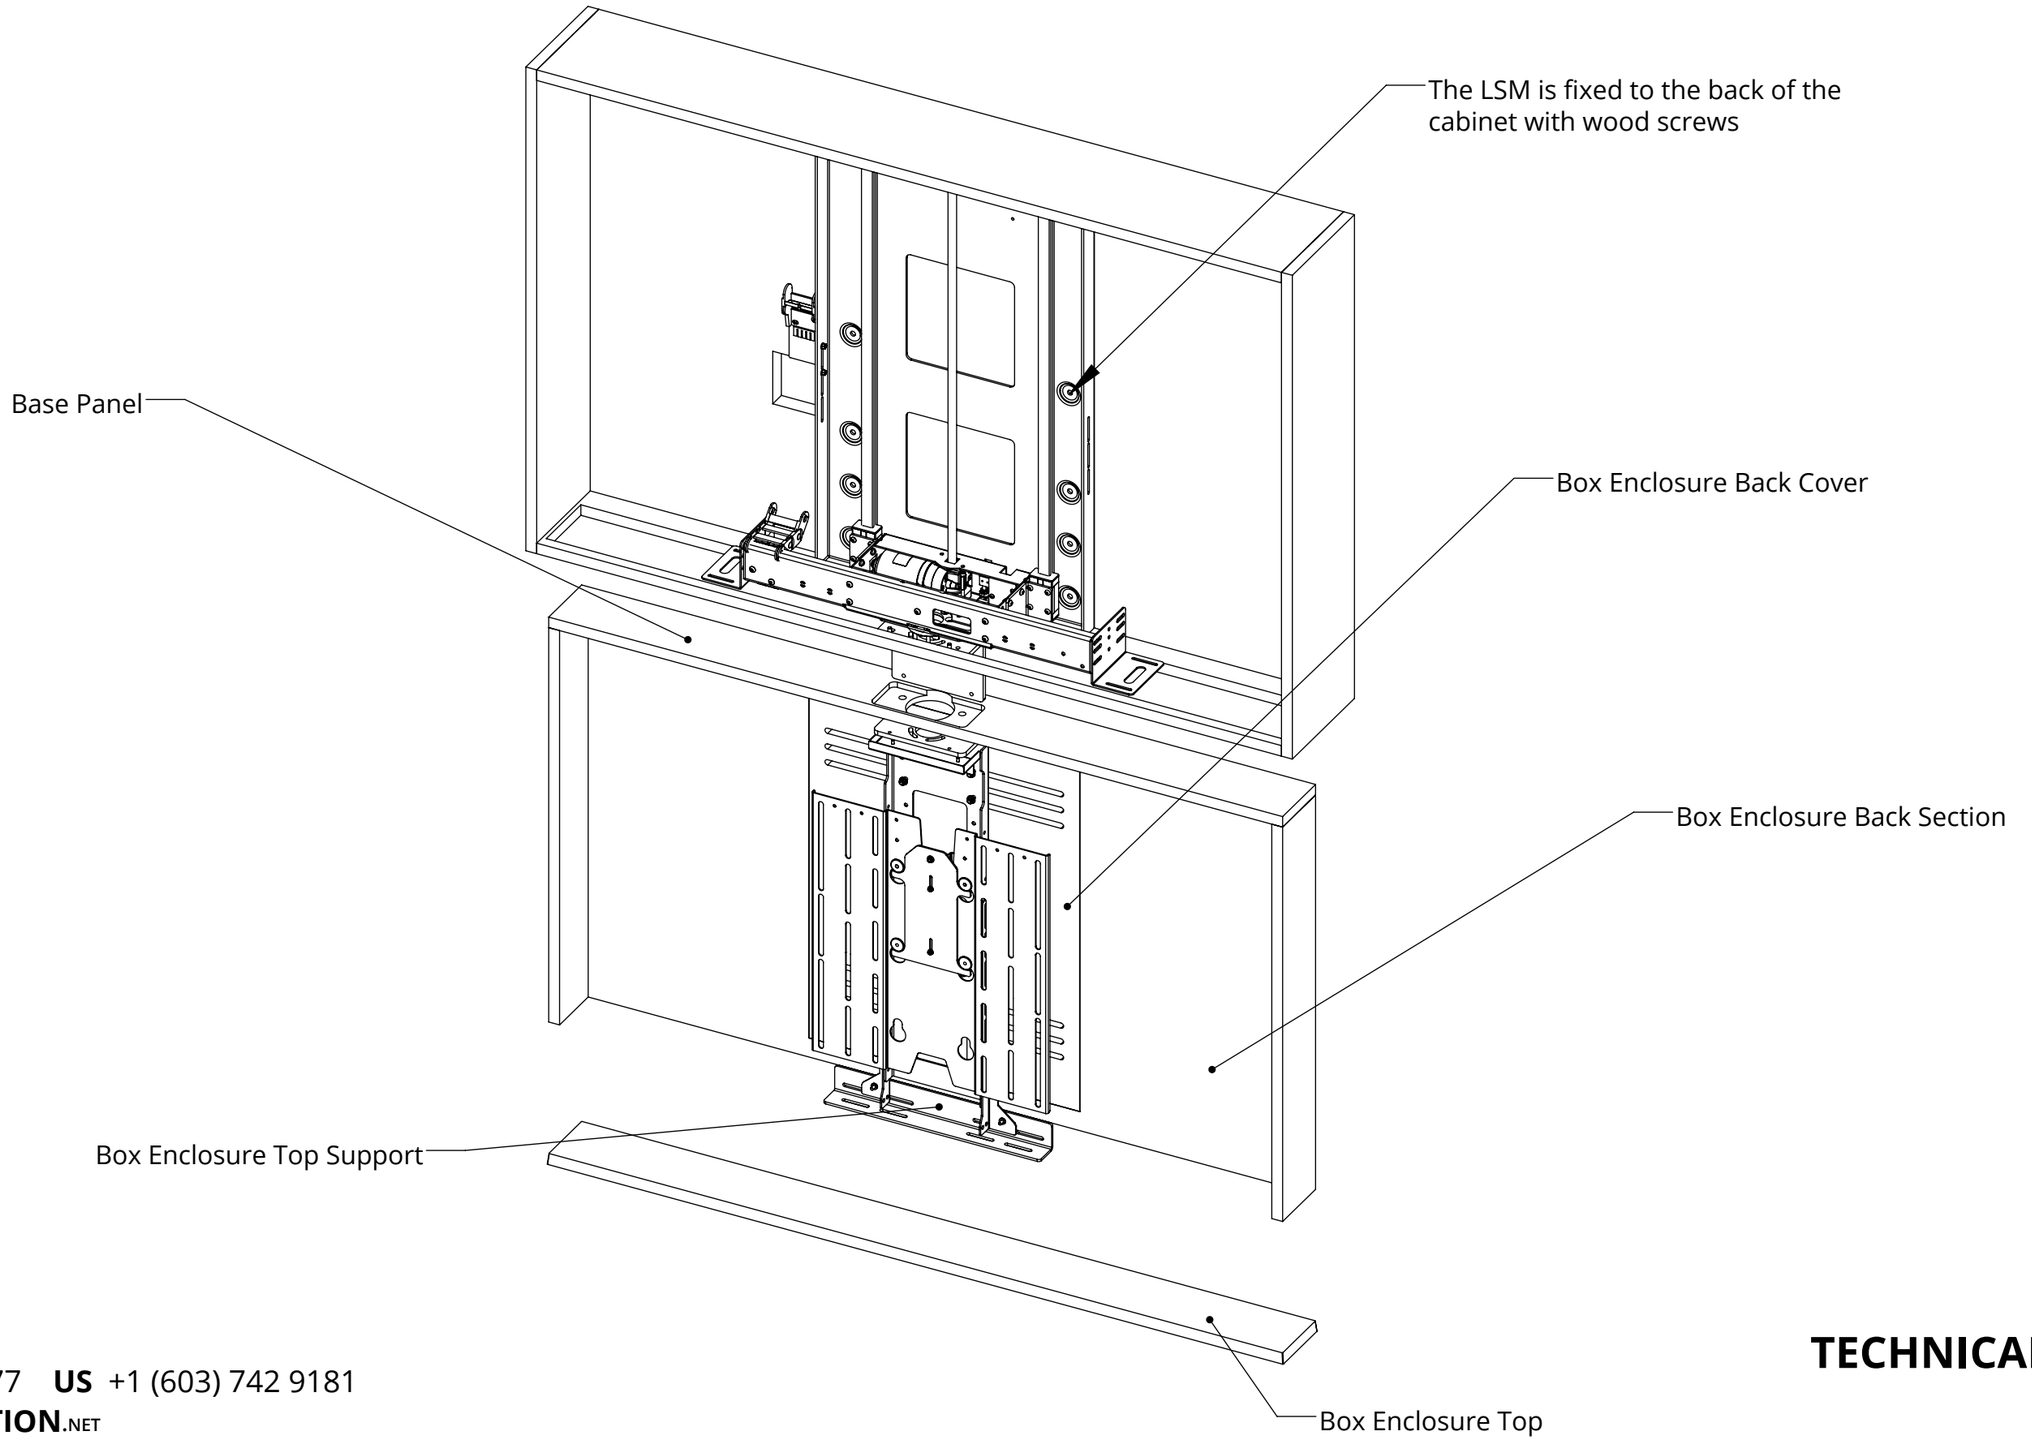


UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


I-LSM-BE 2
INVERTED LIFT SYSTEM FOR BOX ENCLOSURE


OVERALL MECHANISM DIMENSIONS


MECHANISM - DOWN POSITION

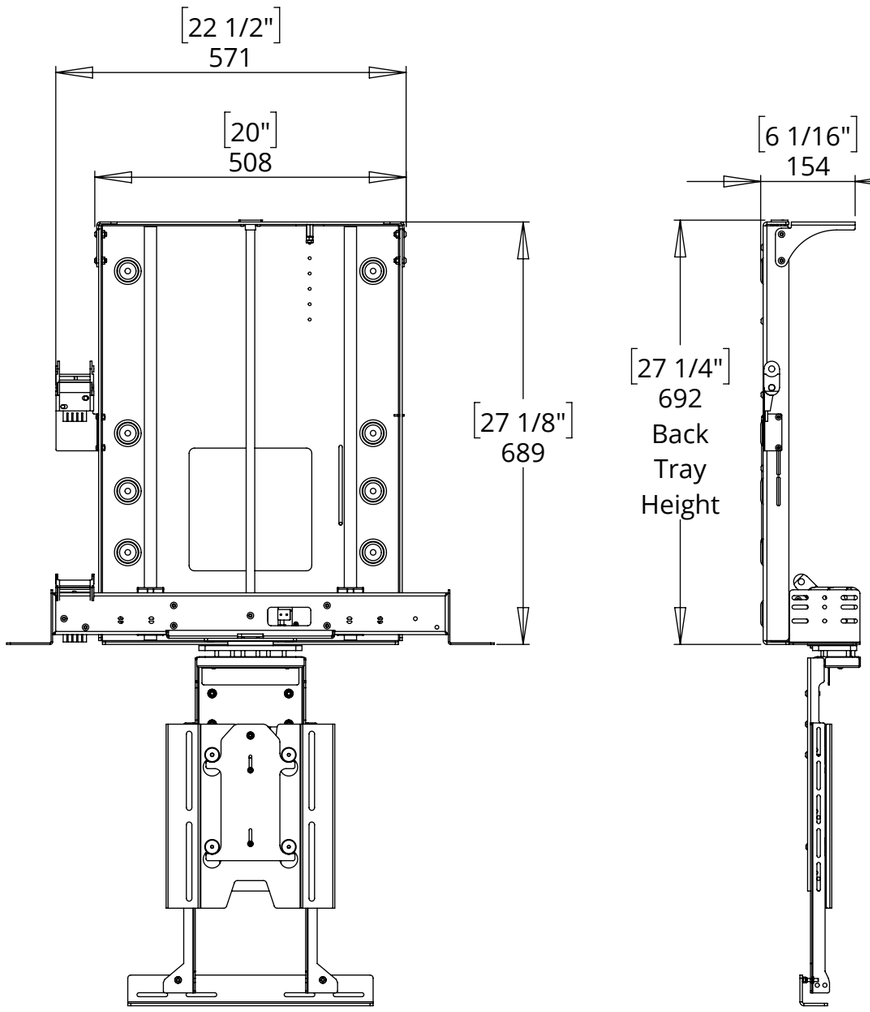

MECHANISM - UP POSITION

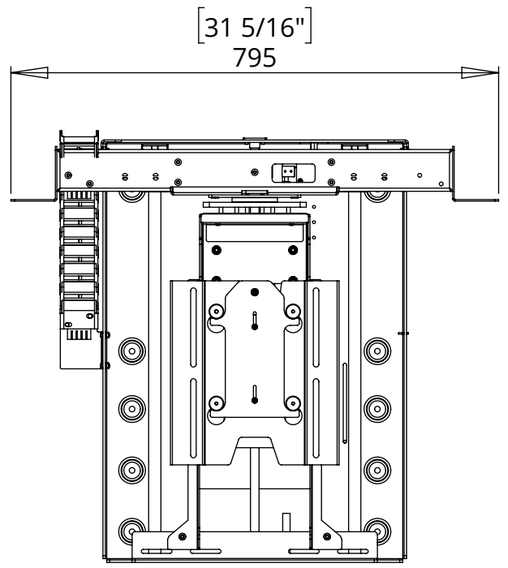

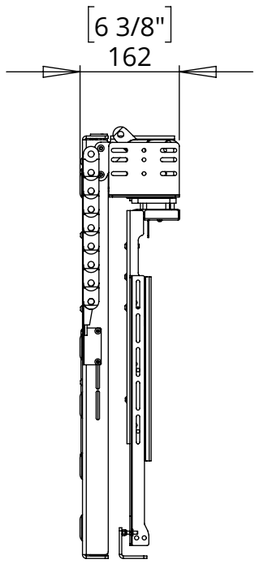

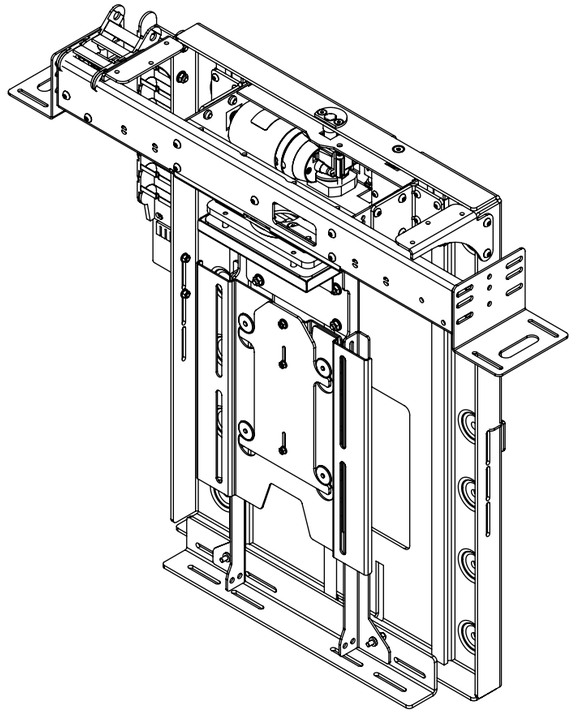



UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET


I-LSM-BE 2
INVERTED LIFT SYSTEM FOR BOX ENCLOSURE

future automation

CONTROL BOX DIMENSIONS

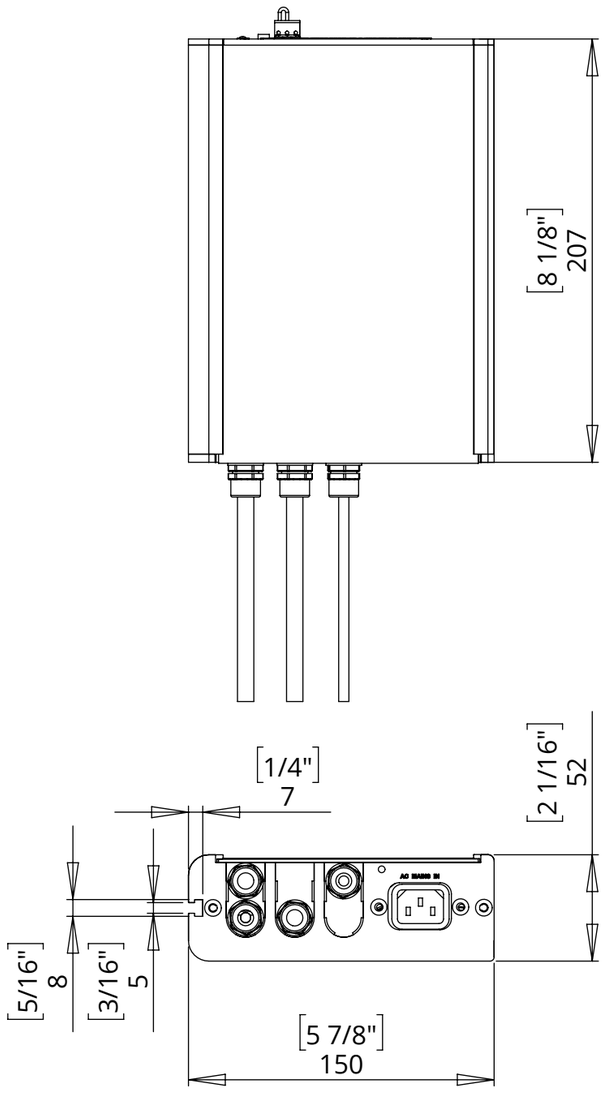

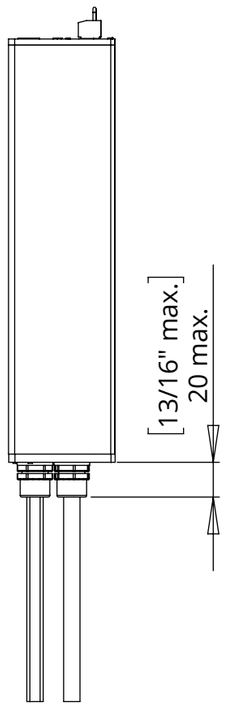

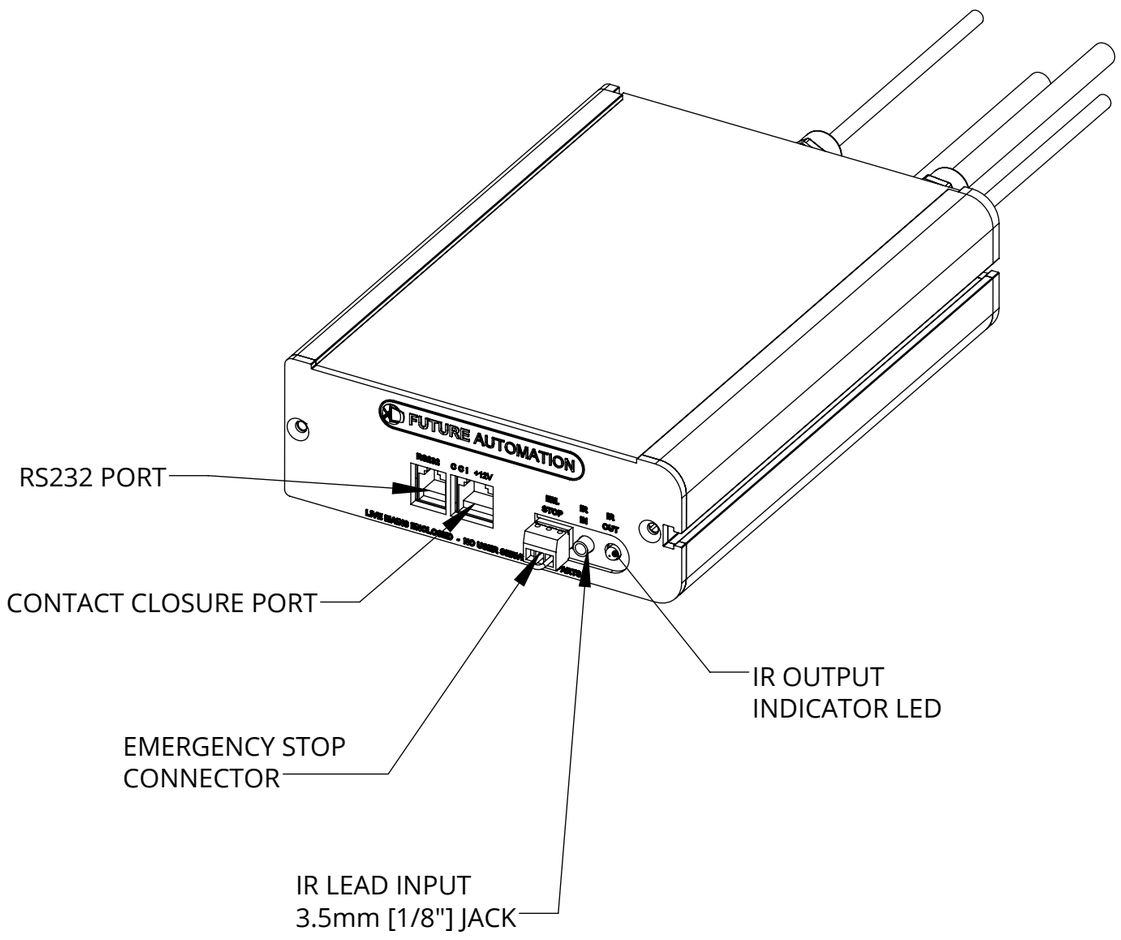

NOTES

CABLE LOOM LENGTH SUPPLIED AT APPROX. 3m [118"]

CONTOL BOX **MUST** BE LOCATED IN AN ACCESSIBLE LOCATION

UK +44 (0) 1438 833577 **US** +1 (603) 742 9181
www.**FUTUREAUTOMATION**.NET